

---

BUILT-IN REFRIGERATOR COLUMNS  
BUILT-IN FREEZER COLUMNS  
BUILT-IN WINE COLUMNS  
BUILT-IN BOTTOM MOUNT

---

DESIGN GUIDE - NORTH AMERICA



## **REFRIGERATORS**

Refrigerators are a core building block of every kitchen. Bertazzoni offers a wide range of applications, sizes, and installation options, which are all harmonized by design to match the entire kitchen appliance suite.

Bertazzoni refrigerators are available in various styles, including Columns, Bottom Mount, and French Door models. With the Bertazzoni Design Guide, you can enjoy flawless installation of all the built-in 84" models from the both the T and V tier lineup.

These built-in models are designed to accommodate custom kitchen panels or stainless-steel doors and handles that match the other appliances in your kitchen. They can be installed proud or flush with the cabinets, bringing your personal style to the kitchen.

We've taken care of every detail so that you can enjoy a seamless and elegant look in your kitchen.

# INDEX



<b>INTRODUCTION</b>	<b>2</b>
<b>T TIER LINE UP</b>	<b>4</b>
<b>BUILT-IN REFRIGERATOR COLUMNS</b>	<b>5</b>
36" Refrigerator Column Panel Installed	7
36" Refrigerator Column Panel Ready	10
30" Refrigerator Column Panel Installed	13
30" Refrigerator Column Panel Ready	16
24" Refrigerator Column Panel Installed	19
24" Refrigerator Column Panel Ready	22
<b>BUILT-IN FREEZER COLUMNS</b>	<b>25</b>
30" Freezer Column Panel Installed	27
30" Freezer Column Panel Ready	30
24" Freezer Column Panel Installed	33
24" Freezer Column Panel Ready	36
18" Freezer Column Panel Installed	39
18" Freezer Column Panel Ready	42
<b>BUILT-IN WINE COLUMNS</b>	<b>45</b>
24" Wine Column Panel Installed	47
24" Wine Column Panel Ready	50
18" Wine Column Panel Installed	53
18" Wine Column Panel Ready	56
<b>COLUMNS MULTIPLE INSTALLATIONS</b>	<b>59</b>
42" Double Configurations	62
48" Double Configurations	63
54" Double Configurations	64
60" Double Configurations	65
60" Triple Configurations	66
66" Triple Configurations	67
72" Triple Configurations	68
78" Triple Configurations	69
84" Triple Configurations	70
90" Triple Configurations	71
Custom Door Panel	72
Recommended Installations	73
Refrigeration Handles	74
Toekick Panel	75
<b>BUILT-IN BOTTOM MOUNT REFRIGERATORS</b>	<b>76</b>
36" Bottom Mount Panel Installed	78
36" Bottom Mount Panel Ready	81
30" Bottom Mount Panel Installed	84
30" Bottom Mount Panel Ready	87
<b>BOTTOM MOUNT MULTIPLE INSTALLATIONS</b>	<b>90</b>
60" Bottom Mount Double Configurations	93
66" Bottom Mount Configurations	94
72" Bottom Mount Configurations	95
48" Double Configurations	96
54" Double Configurations	97
60" Double Configurations	98
Bottom Mount Custom Door Panel	99
Bottom Mount Refrigeration Handles	100

<b>V TIER LINE UP</b>	<b>102</b>
<b>BUILT-IN REFRIGERATOR COLUMNS</b>	<b>103</b>
30" Refrigerator Column Panel Ready	105
24" Refrigerator Column Panel Ready	108
<b>BUILT-IN FREEZER COLUMNS</b>	<b>111</b>
24" Freezer Column Panel Ready	113
18" Freezer Column Panel Ready	116
<b>BUILT-IN WINE COLUMNS</b>	<b>119</b>
24" Wine Column Panel Ready	121
18" Wine Column Panel Ready	124
<b>COLUMNS MULTIPLE INSTALLATIONS</b>	<b>127</b>
Multiple installations	129
42" Double Configurations	130
48" Double Configurations	131
54" Double Configurations	132
60" Triple Configurations	133
66" Triple Configurations	134
72" Triple Configurations	135
78" Triple Configurations	136
Custom Door Panel	137
Recommended Installations	138
Refrigeration Handles	139
<b>BOTTOM MOUNT MULTIPLE INSTALLATIONS</b>	<b>130</b>
60" Bottom Mount Double Configurations	133
66" Bottom Mount Double Configurations	134
72" Bottom Mount Double Configurations	135
French Door Custom Door Panel	136
Bottom Mount Custom Door Panel	137
French Door Refrigeration Handles	138
Bottom Mount Refrigeration Handles	139
<b>BUILT-IN BOTTOM MOUNT AND FRENCH DOOR REFRIGERATORS</b>	<b>140</b>
36" French Door Bottom Mount Panel Ready	142
36" Bottom Mount Panel Ready	145
30" Bottom Mount Panel Ready	148
<b>BOTTOM MOUNTS MULTIPLE INSTALLATIONS</b>	<b>151</b>
60" Bottom Mount Double Configurations	154
66" Bottom Mount Double Configurations	155
72" Bottom Mount Double Configurations	156
48" Double Configurations	157
54" Double Configurations	158
60" Double Configurations	159
French Door Custom Door Panel	160
Bottom Mount Custom Door Panel	161
French Door Refrigeration Handles	162
Bottom Mount Refrigeration Handles	164

---

# T TIER LINE UP





---

# BUILT-IN REFRIGERATOR COLUMNS




## BUILT-IN COLUMNS

Refrigerators, freezers, and wine columns from the T tier are masterpieces of design and technology. Their stylish appearance reflects close attention to detail and high-quality materials, inside and out.

The stainless steel front and panel-ready doors are mounted with state-of-the-art engineered lift-and-swing hinges that give the perception of a weightless range of motion. Versatile installation options make it possible to bring together elegant configurations of the refrigerator, freezer, and wine column in any desired width. All three columns work in harmony with handles and finishes available for every Series.

---

36" - 30" - 24"  
Panel Ready and  
Panel Installed





# 36" Refrigerator Column Panel Installed

## Dimensions



REF36RCPIXL/23 left hinge  
REF36RCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

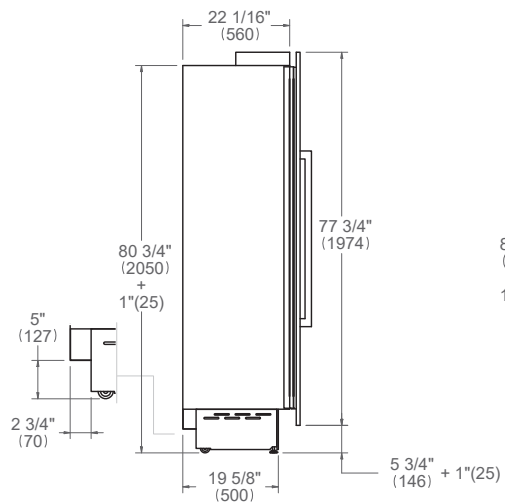


FRONT VIEW

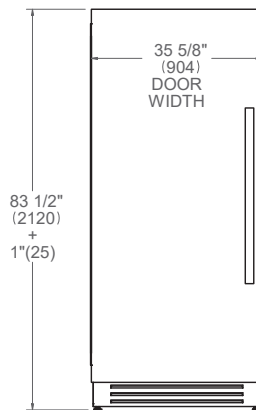


TOP VIEW

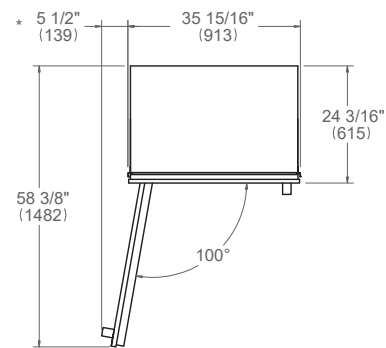


SIDE VIEW

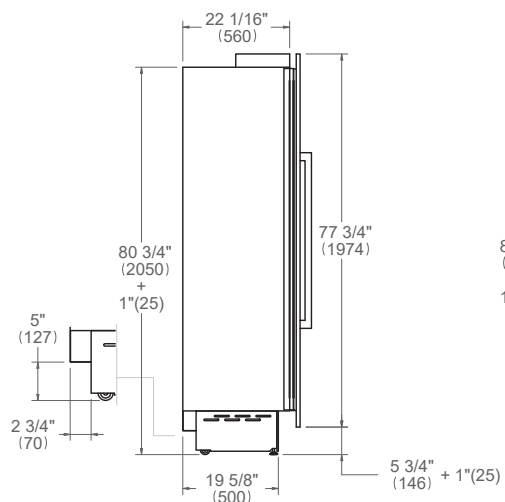

FRONT VIEW

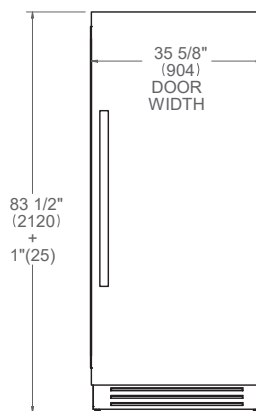

TOP VIEW

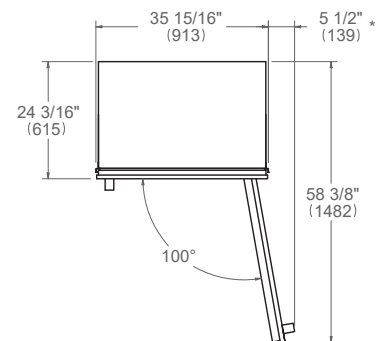

\* Maximum Overall Handle Dimension

For detailed handle dimensions see page 74

# 36" Refrigerator Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg )
------------------------	-------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    218 W    2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Refrigerator Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

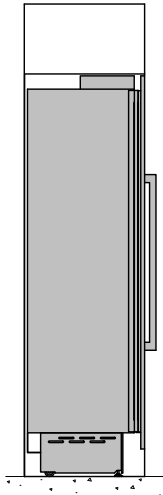

FRONT VIEW

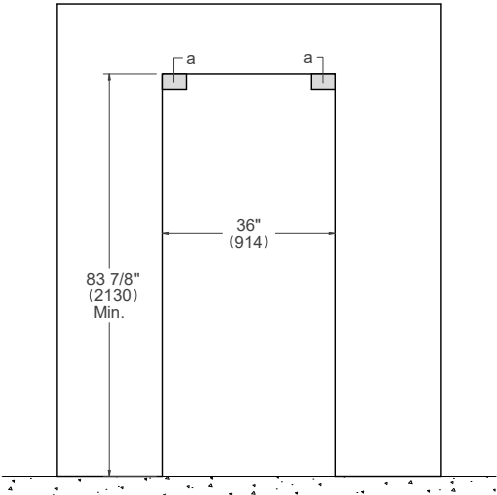

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.




# 36" Refrigerator Column Panel Ready

## Dimensions




REF36RCPRL/23 left hinge  
REF36RCPRR/23 right hinge


SIDE VIEW

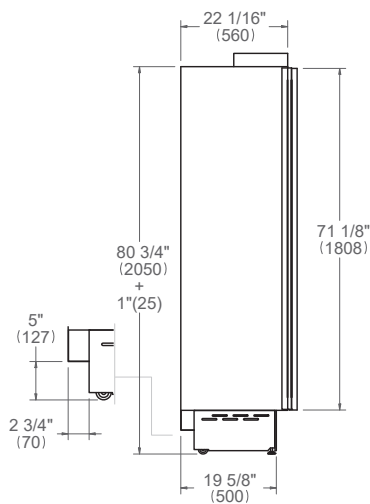


FRONT VIEW

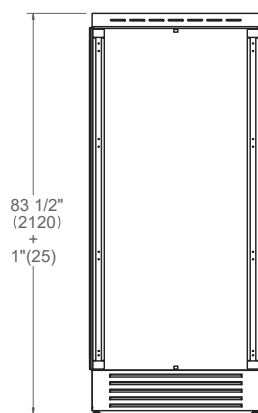


TOP VIEW

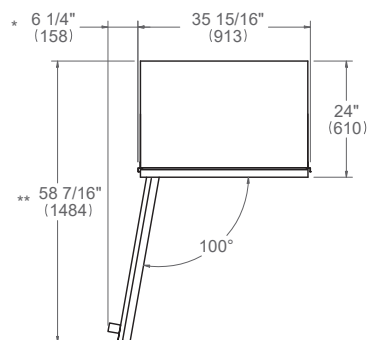


SIDE VIEW

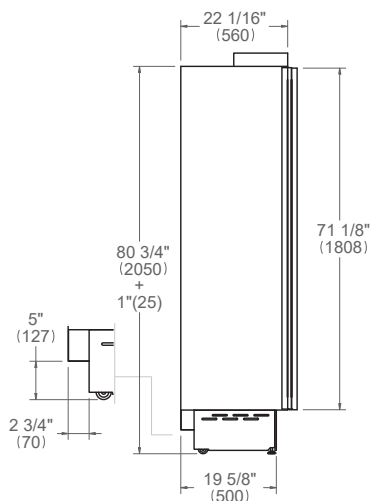

FRONT VIEW

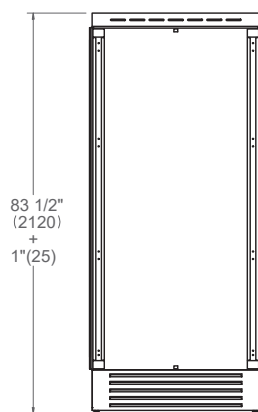

TOP VIEW

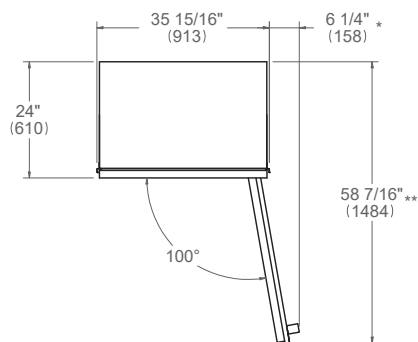

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP36CC

# 36" Refrigerator Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg )
------------------------	-------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    218 W    2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Refrigerator Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

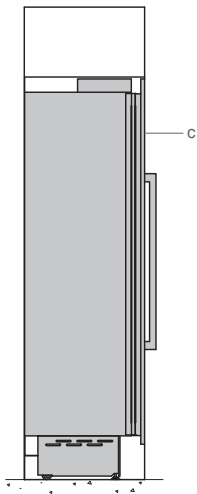

FRONT VIEW

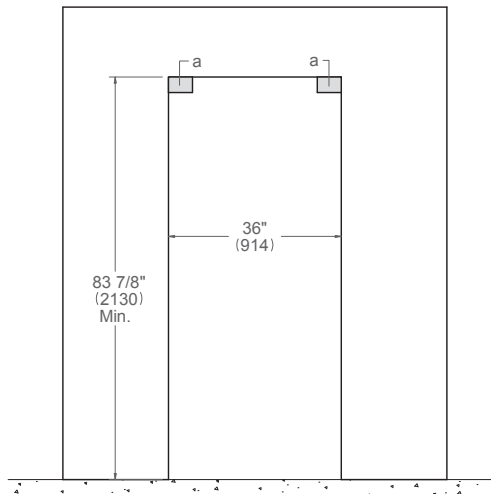

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.



# 30" Refrigerator Column Panel Installed

## Dimensions



REF30RCPIXL/23 left hinge  
REF30RCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

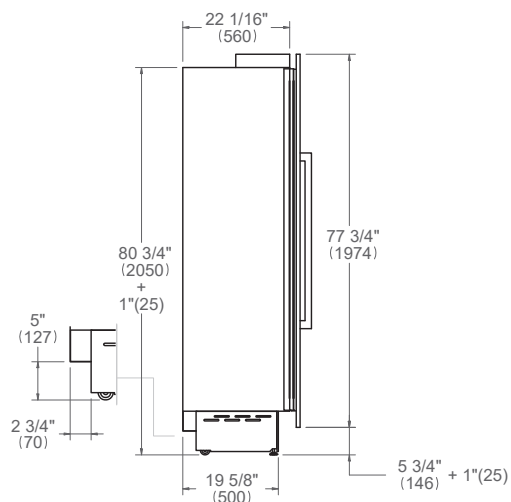


FRONT VIEW

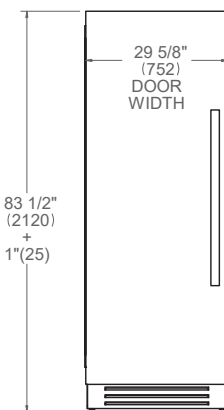


TOP VIEW




SIDE VIEW

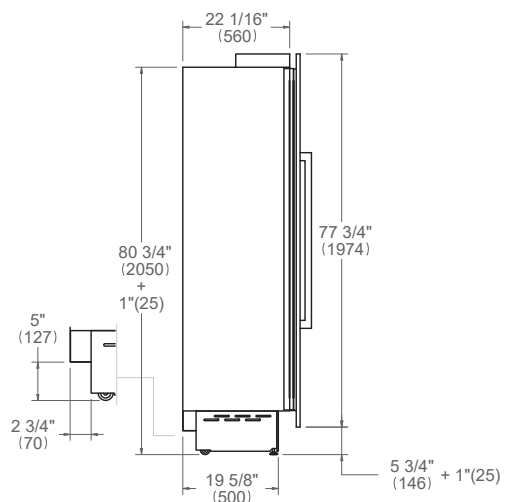

FRONT VIEW

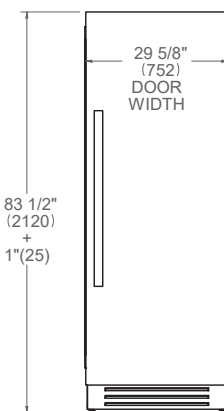

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Refrigerator Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg )
------------------------	-------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

#### TOP VIEW



#### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 218 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Refrigerator Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

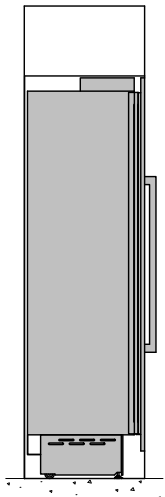

FRONT VIEW

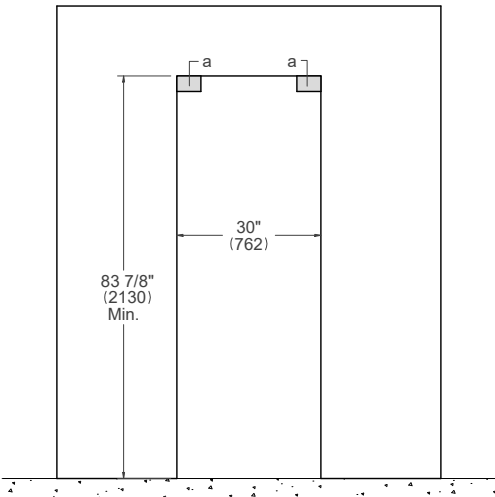

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 30" Refrigerator Column Panel Ready

## Dimensions




REF30RCPRL/23 left hinge  
REF30RCPRR/23 right hinge


SIDE VIEW

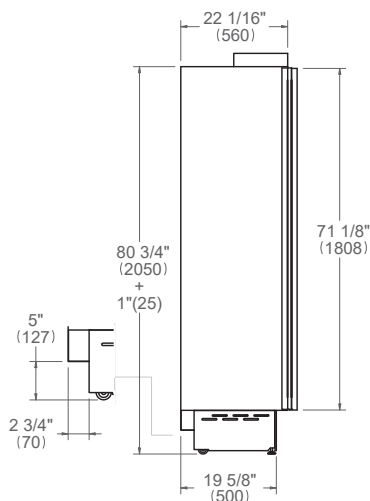


FRONT VIEW

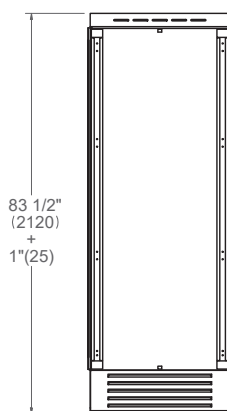


TOP VIEW




SIDE VIEW

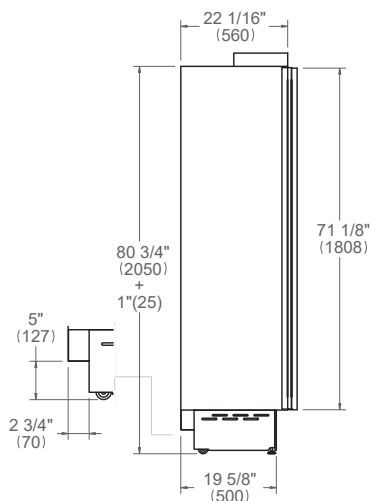

FRONT VIEW

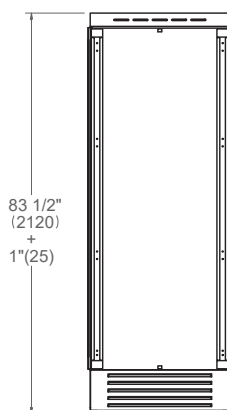

TOP VIEW

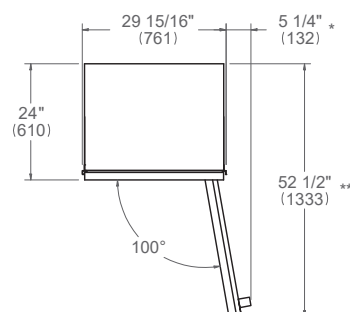

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP30CC.

# 30" Refrigerator Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.  
For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1257 lb (570 kg )
------------------------	-------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    218 W    2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Refrigerator Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

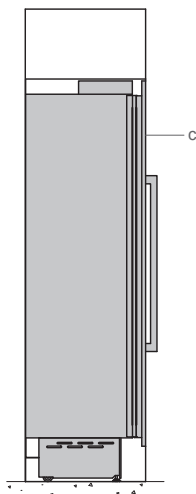

FRONT VIEW

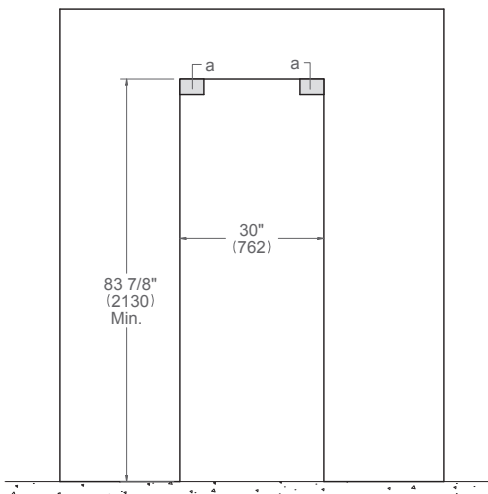

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

# 24" Refrigerator Column Panel Installed

## Dimensions



REF24RCPIXL/23 left hinge  
REF24RCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

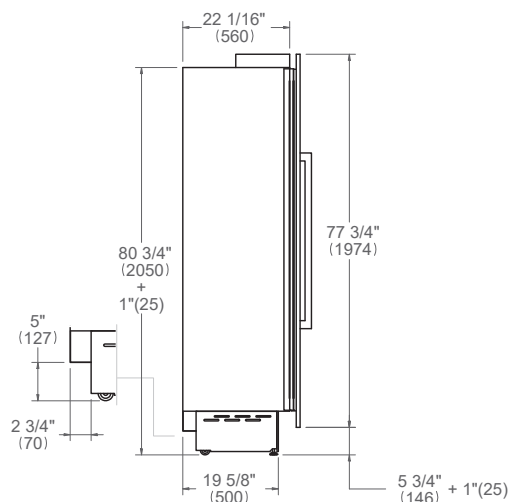


FRONT VIEW

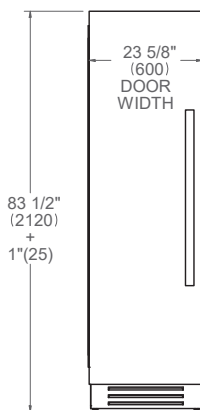


TOP VIEW




SIDE VIEW

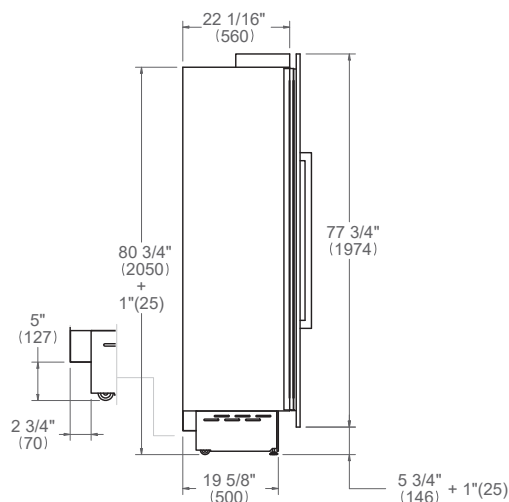

FRONT VIEW

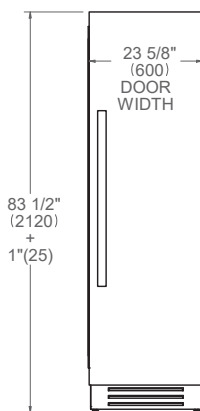

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Refrigerator Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg )
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    163 W    1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

Dimensions in parentheses are millimeters unless otherwise specified.




# 24" Refrigerator Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

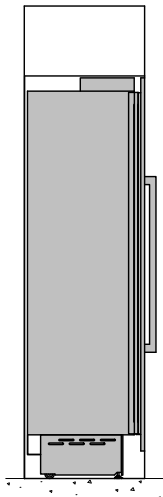

FRONT VIEW

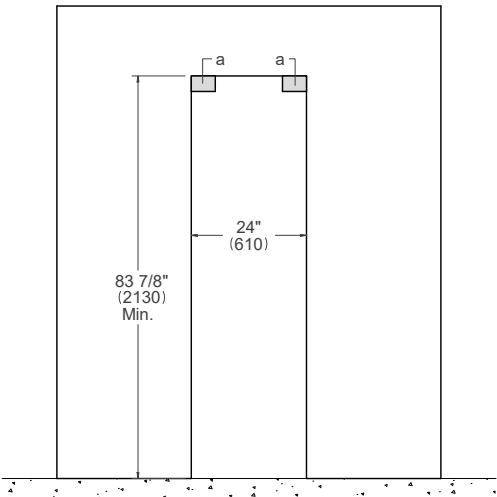

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 24" Refrigerator Column Panel Ready

## Dimensions




REF24RCPRL/23 left hinge  
REF24RCPRR/23 right hinge


SIDE VIEW

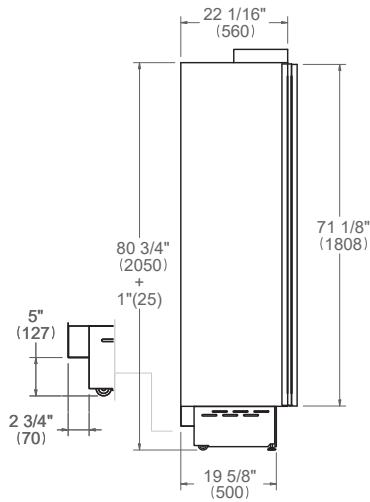


FRONT VIEW

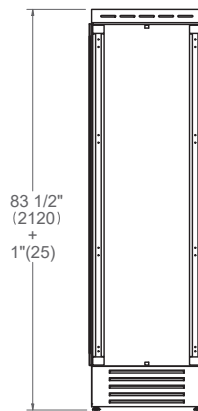


TOP VIEW




SIDE VIEW

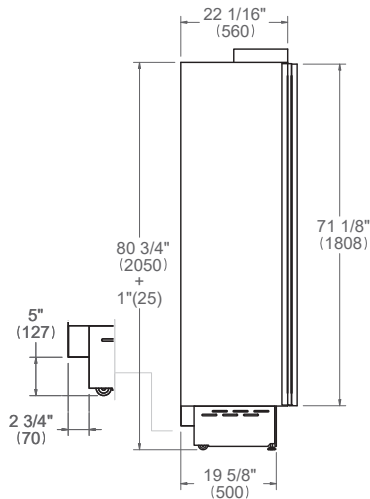

FRONT VIEW

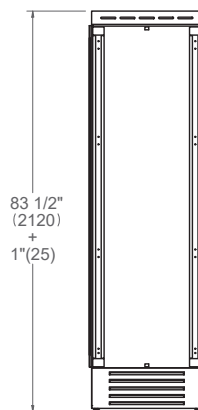

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP24CC.

# 24" Refrigerator Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg )
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    163 W    1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Refrigerator Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

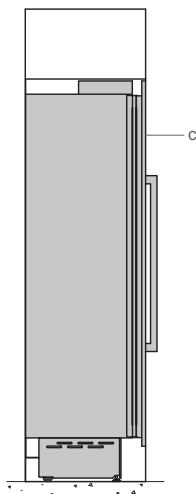

FRONT VIEW

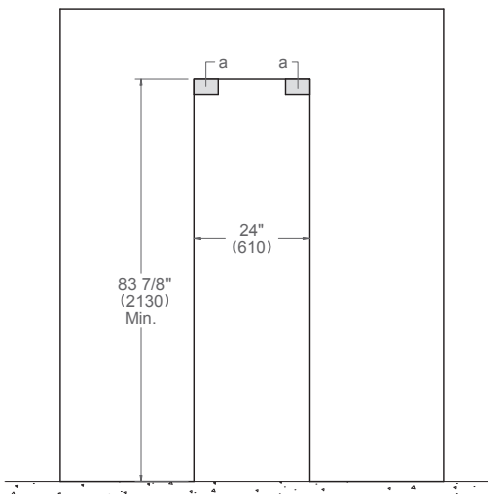

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

# BUILT-IN FREEZER COLUMNS



30" - 24" - 18"  
Panel Ready and  
Panel Installed





# 30" Freezer Column Panel Installed

## Dimensions



REF30FCPIXL/23 left hinge  
REF30FCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

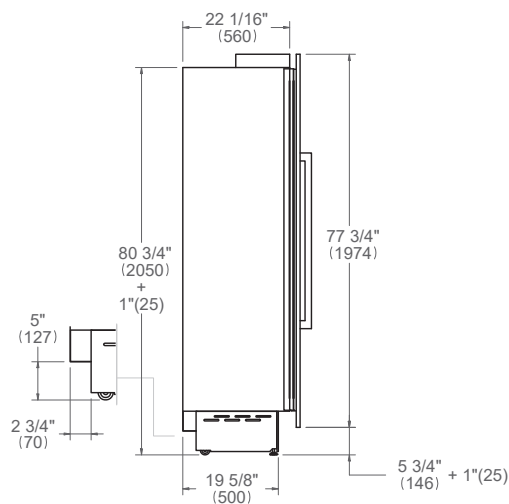


FRONT VIEW

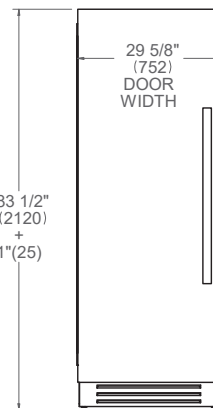


TOP VIEW




SIDE VIEW

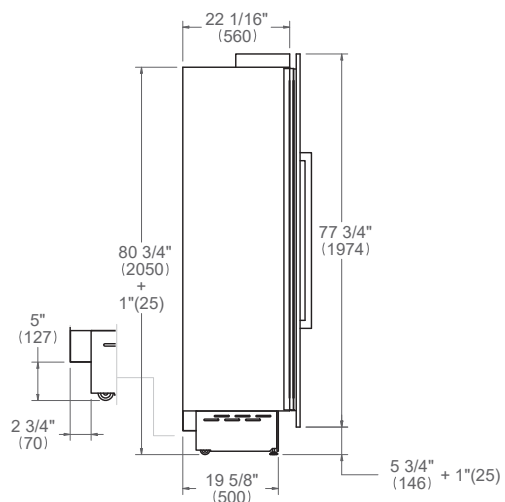

FRONT VIEW

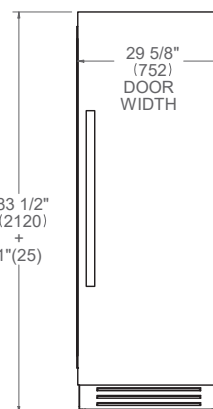

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.



# 30" Freezer Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1257 lb (570 kg )
------------------------	-------------------

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.  
For information on how to purchase the water filter, please see Use and Maintenance Manual.

Dimensions in parentheses are millimeters unless otherwise specified.




# 30" Freezer Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

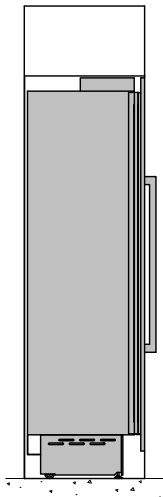

FRONT VIEW

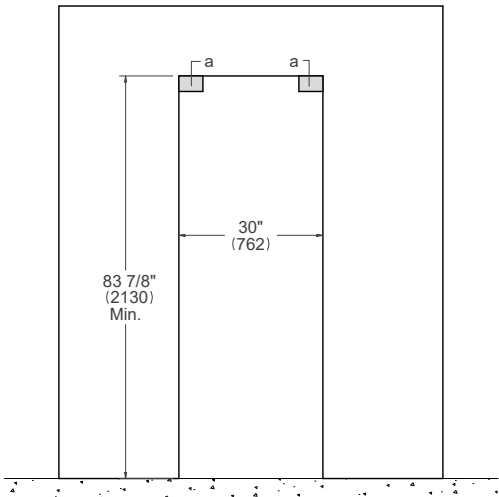

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 30" Freezer Column Panel Ready

## Dimensions




REF30FCPRL/23 left hinge  
REF30FCPRR/23 right hinge


SIDE VIEW

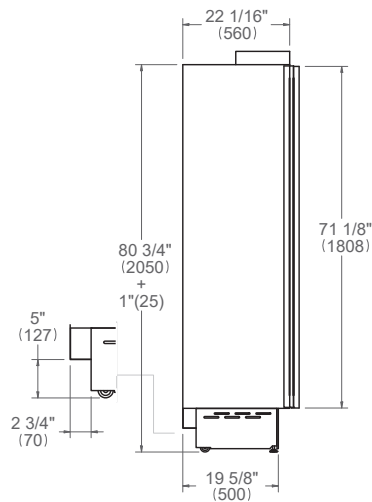


FRONT VIEW

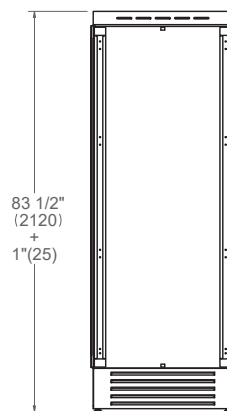


TOP VIEW

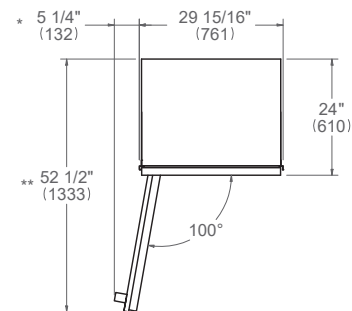


SIDE VIEW

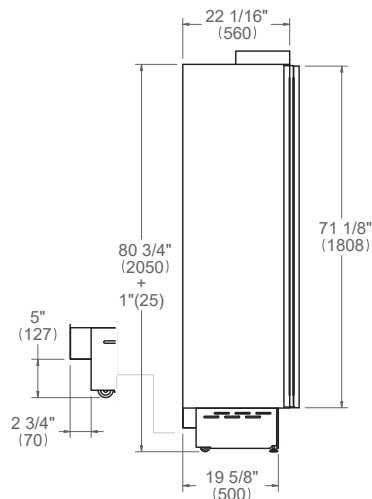

FRONT VIEW

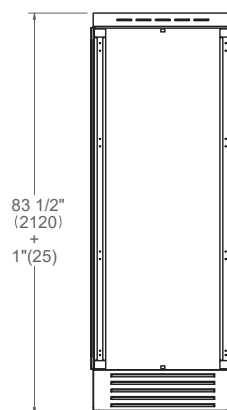

TOP VIEW

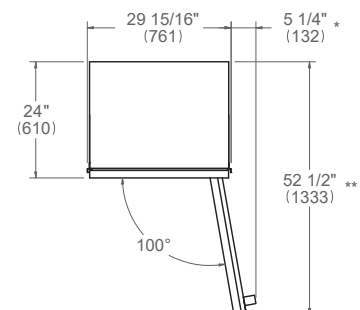

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP30CC.

# 30" Freezer Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg )
------------------------	-------------------

### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.


A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    327 W    3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Freezer Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

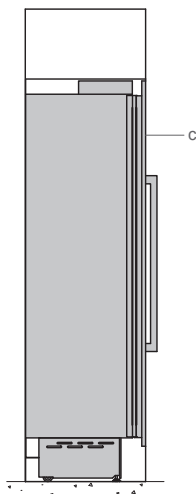

FRONT VIEW

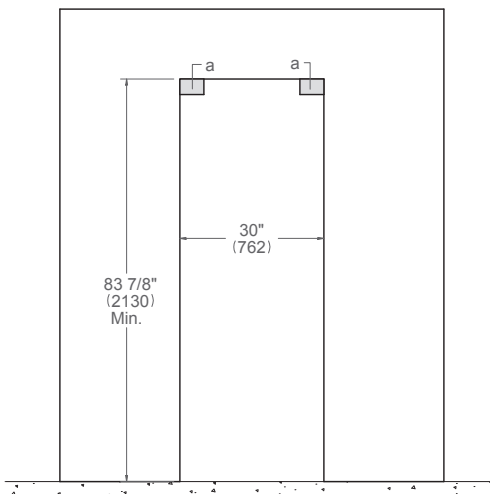

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

# 24" Freezer Column Panel Installed

## Dimensions



REF24FCIPIXL/23 left hinge  
REF24FCIPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

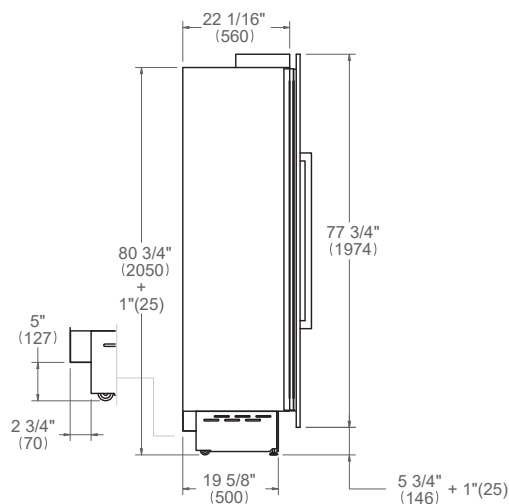


FRONT VIEW

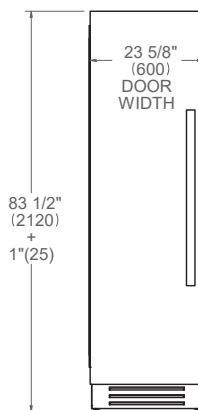


TOP VIEW




SIDE VIEW

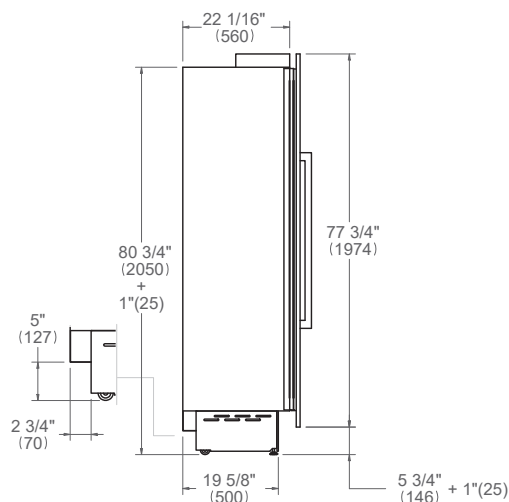

FRONT VIEW

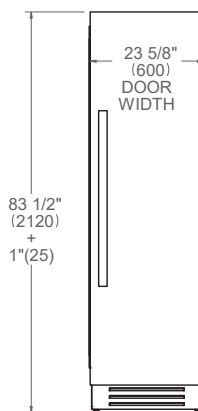

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Freezer Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product..

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg )
------------------------	------------------

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 327 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.  
For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Freezer Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

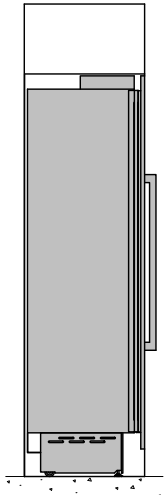

FRONT VIEW

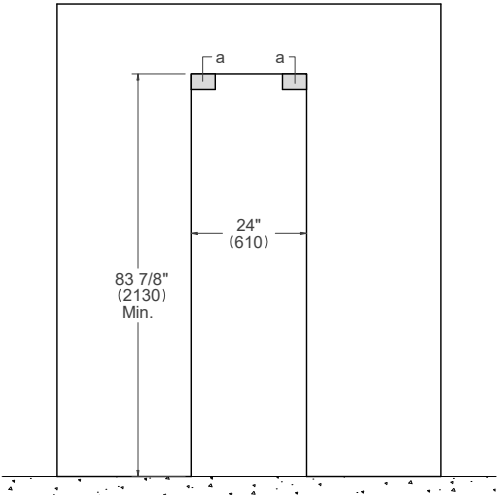

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 24" Freezer Column Panel Ready

## Dimensions




REF24FCIPRL/23 left hinge  
REF24FCIPRR/23 right hinge


SIDE VIEW

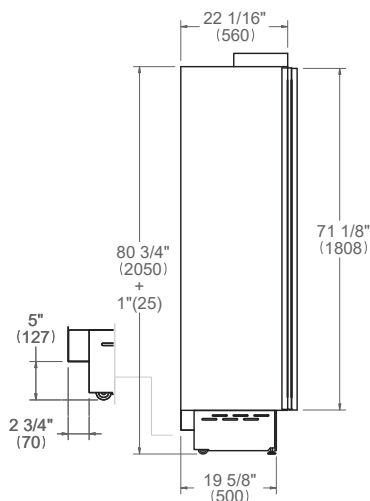


FRONT VIEW

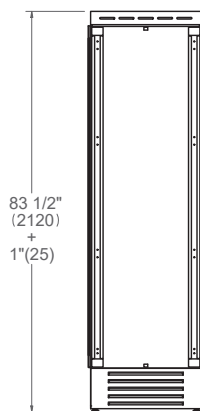


TOP VIEW




SIDE VIEW

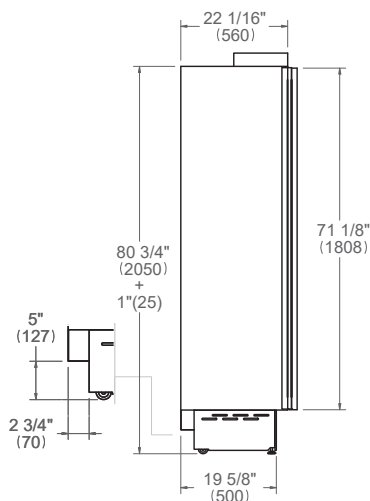

FRONT VIEW

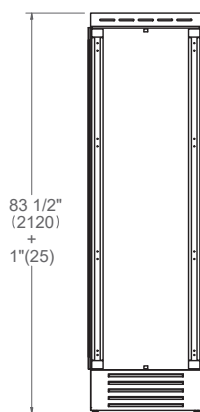

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP24CC.



# 24" Freezer Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	992 lb (450 kg )
------------------------	------------------

### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.


A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    327 W    3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Freezer Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

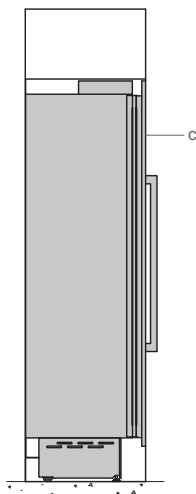

FRONT VIEW

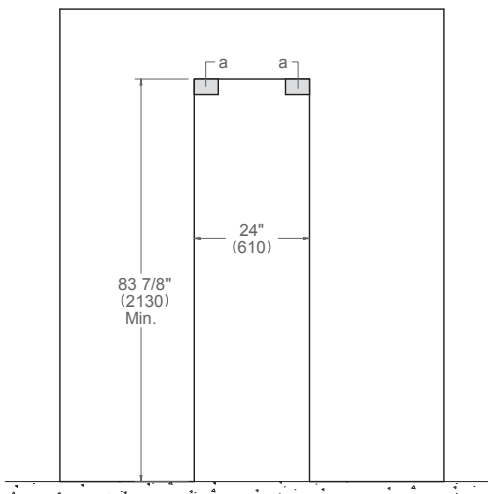

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

# 18" Freezer Column Panel Installed

## Dimensions



REF18FCIPIXL/23 left hinge  
REF18FCIPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

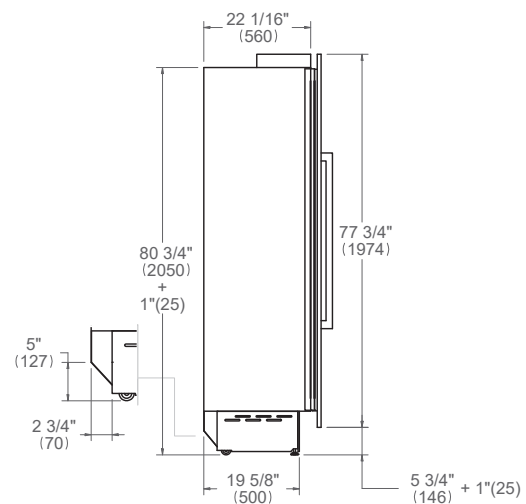


FRONT VIEW

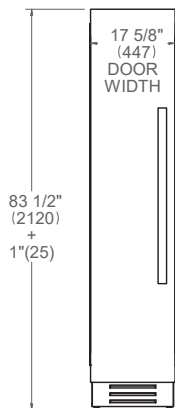


TOP VIEW




SIDE VIEW

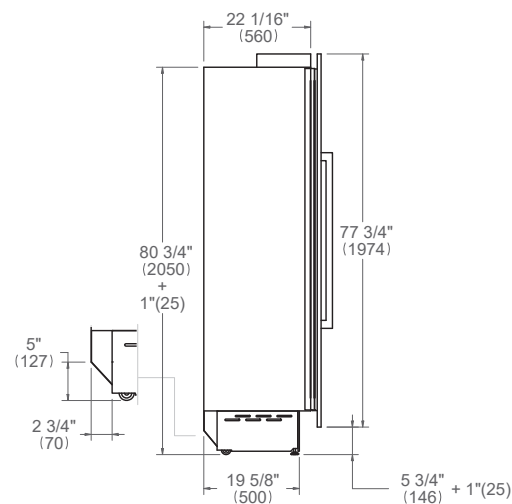

FRONT VIEW

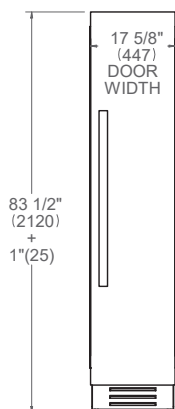

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Freezer Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	694 lb (315 kg )
------------------------	------------------

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    327 W    3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.  
For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Freezer Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

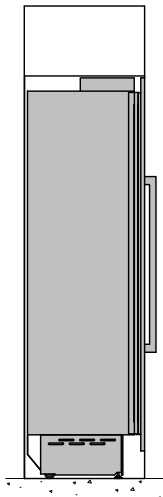

FRONT VIEW

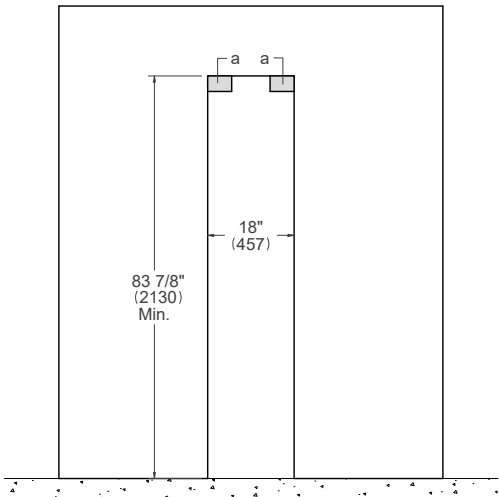

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 18" Freezer Column Panel Ready

## Dimensions




REF18FCIPRL/23 left hinge  
REF18FCIPRR/23 right hinge


SIDE VIEW

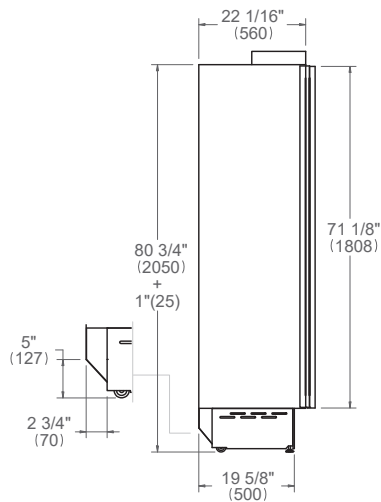


FRONT VIEW

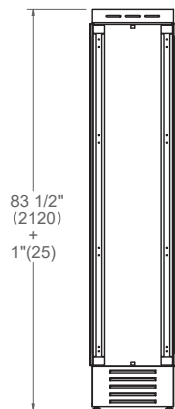


TOP VIEW




SIDE VIEW

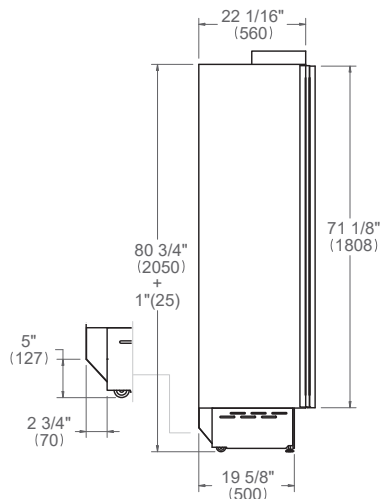

FRONT VIEW

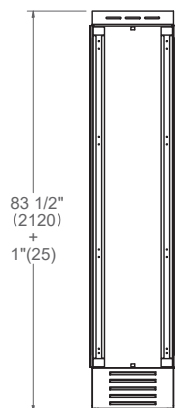

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

A matching Carbonio panel kit is available - SKU # SP18CC.

# 18" Freezer Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg )
------------------------	------------------

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    327 W    3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Freezer Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

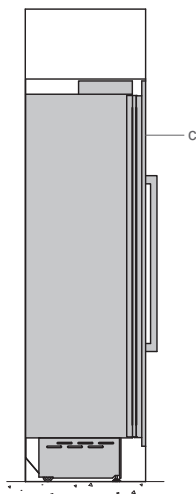

FRONT VIEW

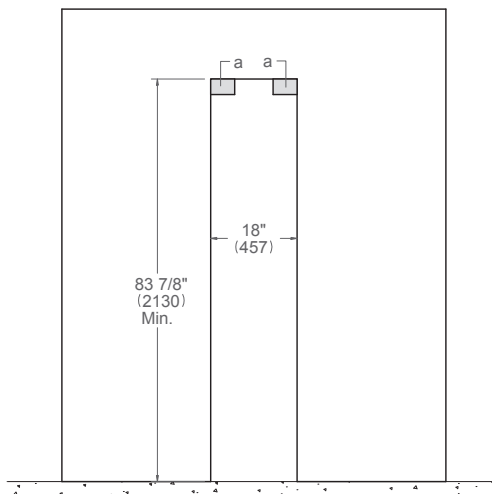

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.


b: depth includes kitchen cabinet front panel.



# BUILT-IN WINE COLUMNS



24" - 18"  
Panel Ready and  
Panel Installed





# 24" Wine Column Panel Installed

## Dimensions



REF24WCPIXL/23 left hinge

REF24WCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

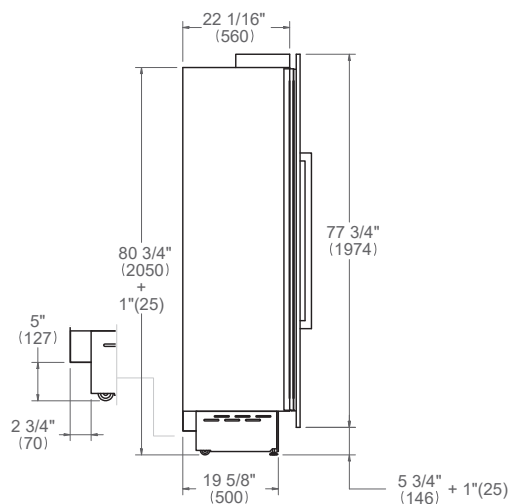


FRONT VIEW

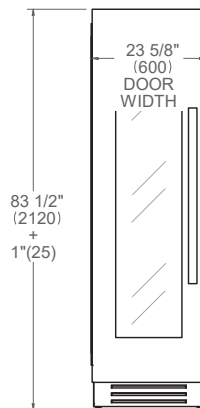


TOP VIEW




SIDE VIEW

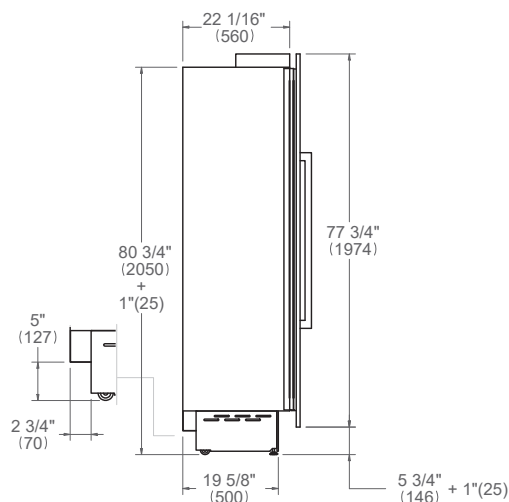

FRONT VIEW

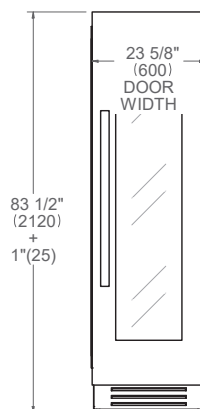

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Wine Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg )
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    152 W    1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Wine Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW



FRONT VIEW

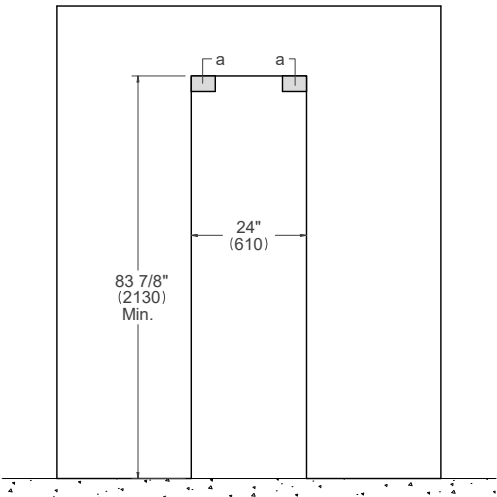

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.




# 24" Wine Column Panel Ready

## Dimensions




REF24WCPRL/23 left hinge  
REF24WCPRR/23 right hinge


SIDE VIEW

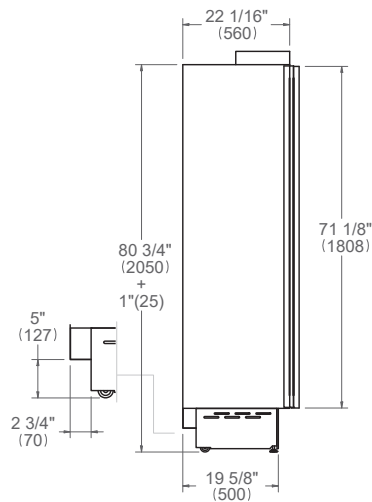


FRONT VIEW

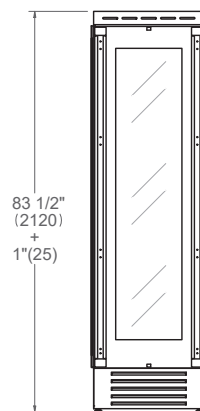


TOP VIEW




SIDE VIEW

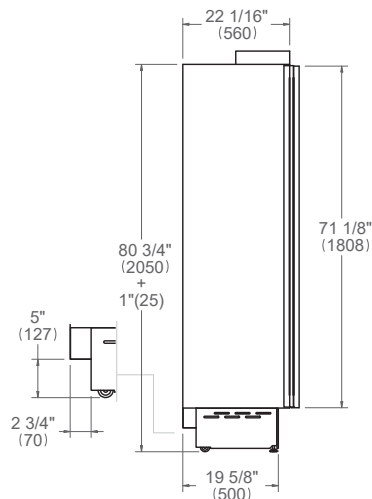

FRONT VIEW

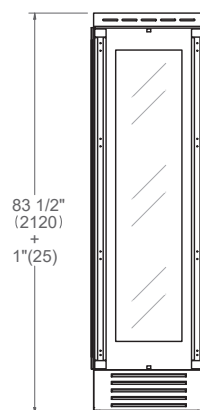

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

For custom panel dimensions and window cutout see page 69.

A matching Carbonio panel kit is available - SKU # SP24WCC

# 24" Wine Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.  
For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	992 lb (450 kg )
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    152 W    1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Wine Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

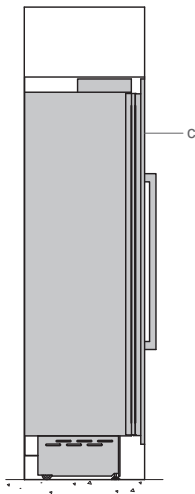

FRONT VIEW

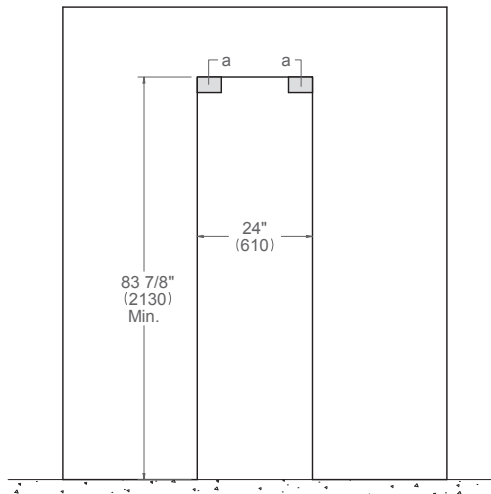

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.



# 18" Wine Column Panel Installed

## Dimensions



REF18WCPIXL/23 left hinge  
REF18WCPIXR/23 right hinge


### Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

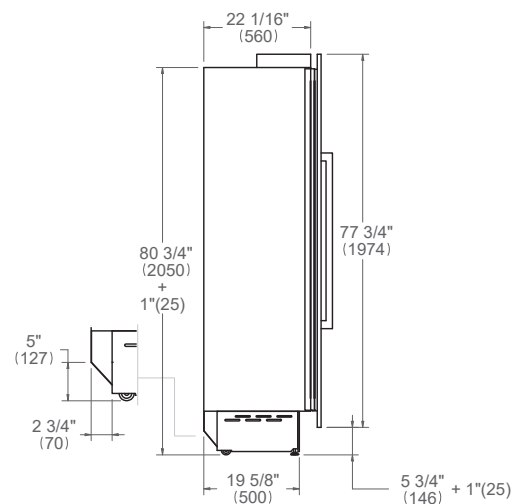


FRONT VIEW

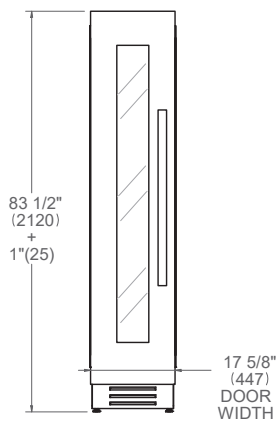


TOP VIEW




SIDE VIEW

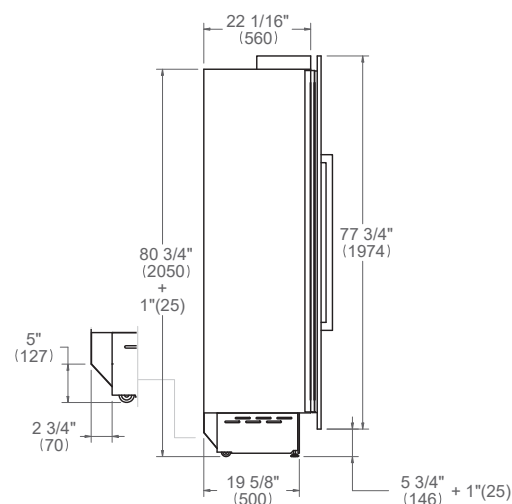

FRONT VIEW

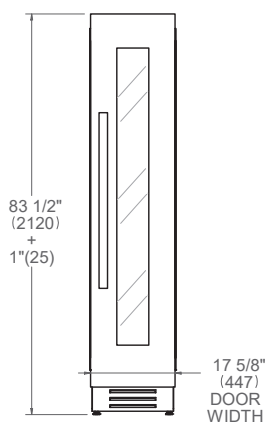

TOP VIEW



\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Wine Column Panel Installed

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.  
Finish the edges of the opening because they may be visible when the door is open.  
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg )
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    152 W    1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Wine Column Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW



FRONT VIEW

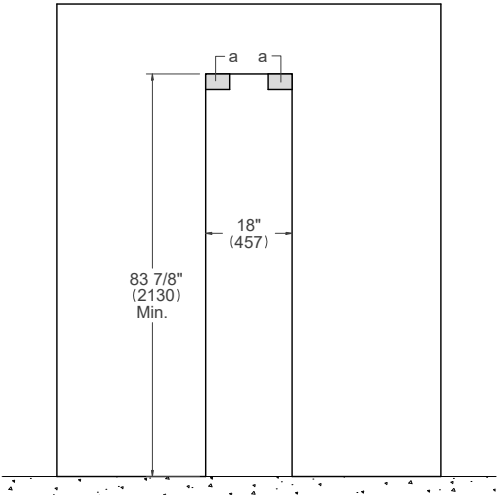

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 18" Wine Column Panel Ready

## Dimensions




REF18WCPRL/23 left hinge  
REF18WCPRR/23 right hinge


SIDE VIEW

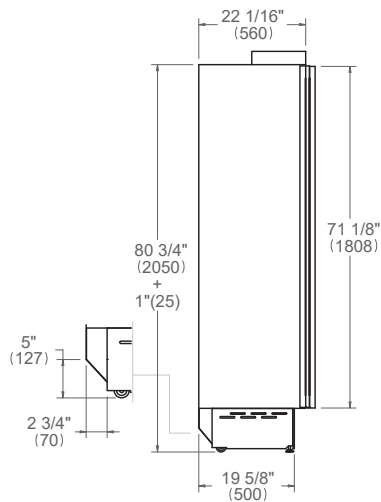


FRONT VIEW

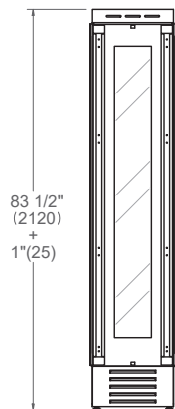


TOP VIEW




SIDE VIEW

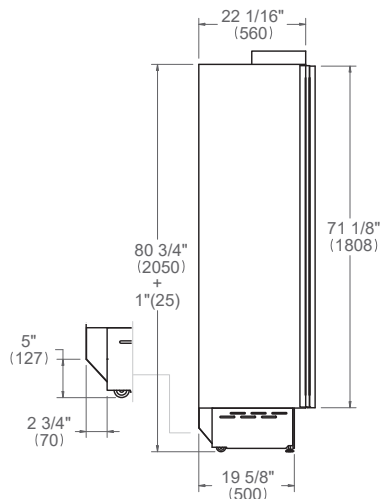

FRONT VIEW

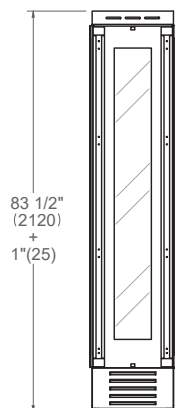

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 72

For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

For custom panel dimensions and window cutout see page 69.

A matching Carbonio panel kit is available - SKU # SP18WCC.

# 18" Wine Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	694 lb (315 kg )
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    152 W    1.4 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 79" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Wine Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

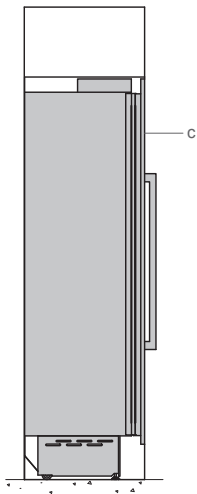

FRONT VIEW

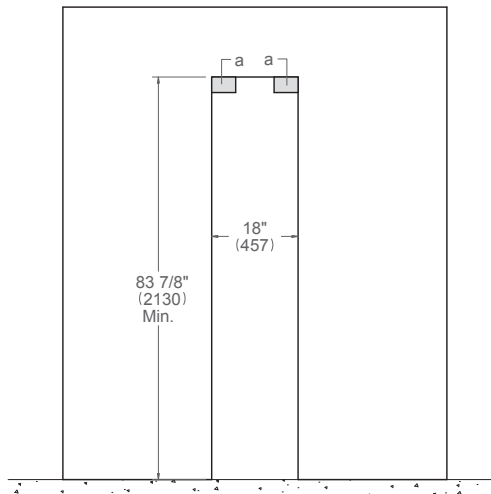

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

---

# COLUMNS MULTIPLE INSTALLATIONS









# Multiple installations

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 75 pounds (34 kg) for door panel. Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

**For instructions of product combinations please see the Multiple Installation Section (page 59).**

### CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation. Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

### TOP VIEW



### FRONT VIEW



A separate 10 Amp circuit breaker servicing only these appliances is recommended.

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.

# 42" Double Configurations


## Flush installation



### POSSIBLE COMBINATIONS <sup>c</sup>


REF24RCPIX(L/R)/23  
REF18FCIPIX(L/R)/23

REF24RCPR(L/R)/23  
REF18FCIPR(L/R)/23




REF24RCPIX(L/R)/23  
REF18WCPIX(L/R)/23


REF24RCPR(L/R)/23  
REF18FCIPR(L/R)/23



### TOP VIEW <sup>b</sup>

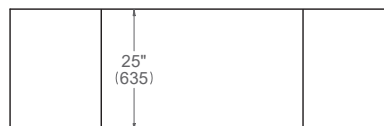

### FRONT VIEW

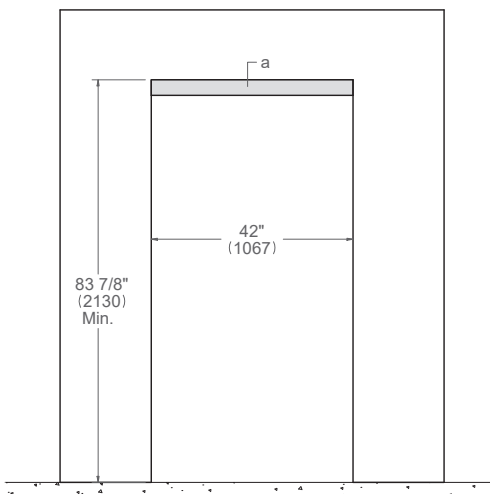

(a) Area to be left clear for the anti-tipping brackets – 42"x4" (1067x100mm)

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

c: Optional 42 inch bridge toe kick accessory is available.

For details see page 75


# 48" Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS <sup>c</sup>


REF30RCPIX(L/R)/23  
REF18FCIPX(L/R)/23  
REF30RCPR(L/R)/23  
REF18FCIPR(L/R)/23




REF30RCPIX(L/R)/23  
REF18WCPIX(L/R)/23  
REF30RCPR(L/R)/23  
REF18WCPR(L/R)/23



REF24RCPIX(L/R)/23  
REF24FCIPX(L/R)/23  
REF24RCPR(L/R)/23  
REF24FCIPR(L/R)/23




REF24RCPIX(L/R)/23  
REF24WCPIX(L/R)/23  
REF24RCPR(L/R)/23  
REF24WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

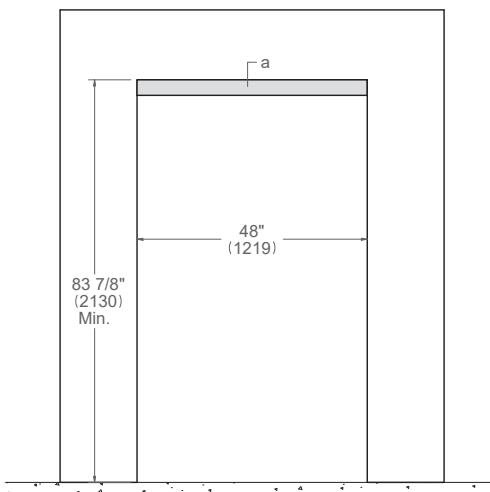

- a: Area to be left clear for the anti-tipping brackets – 48"x4" (1219x100mm)
- b: Depth includes kitchen cabinet front panel.
- c: Optional 48 inch bridge toe kick accessory is available. For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.

No additional accessories are needed.



# 54" Double Configurations

## Flush installation

### POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23

REF24FCPIX(L/R)/23

REF30RCPR(L/R)/23

REF24FCIPR(L/R)/23

REF30RCPIX(L/R)/23

REF18WCPIX(L/R)/23

REF30RCPR(L/R)/23

REF18WCPR(L/R) /23

REF36RCPIX(L/R)/23

REF18FCPIX(L/R)/23

REF36RCPR(L/R)/23

REF18FCIPR(L/R)/23

REF36RCPIX(L/R)/23

REF18WCPIX(L/R)/23


REF36RCPR(L/R)/23

REF18WCPR(L/R)/23

### TOP VIEW <sup>b</sup>



### FRONT VIEW

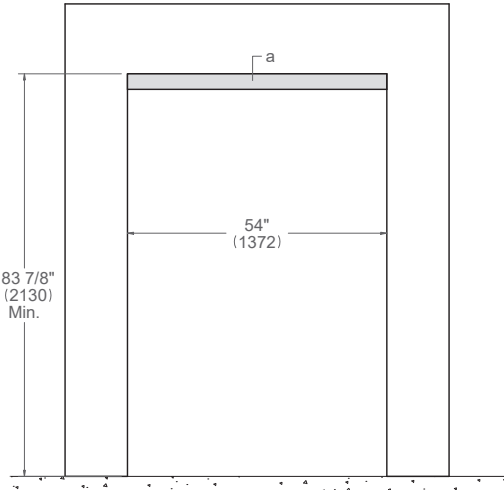

a: Area to be left clear for the anti-tipping brackets – 54"x4" (1372x100mm)  
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.  
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


# 60" Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS


REF30RCPIX(L/R)/23  
REF30FCPIX(L/R)/23  
REF30RCPR(L/R)/23  
REF30FCIPR(L/R)/23



REF36RCPIX(L/R)/23  
REF24WCPIX(L/R)/23  
REF36RCPR(L/R)/23  
REF24WCPR(L/R)/23




REF36RCPIX(L/R)/23  
REF24FCPIX(L/R)/23  
REF36RCPR(L/R)/23  
REF24FCIPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

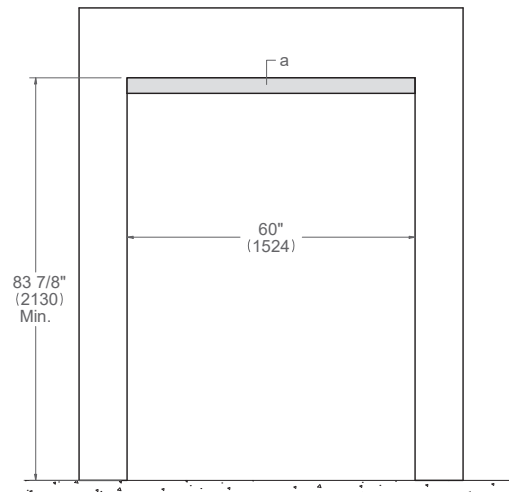

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# 60" Triple Configurations





## Flush installation



### POSSIBLE COMBINATIONS

REF24RCPIX(L/R)/23  
REF18FCPIX(L/R)/23  
REF18WCPIX(L/R)/23


REF24RCPR(L/R)/23  
REF18FCIPR(L/R)/23  
REF18WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

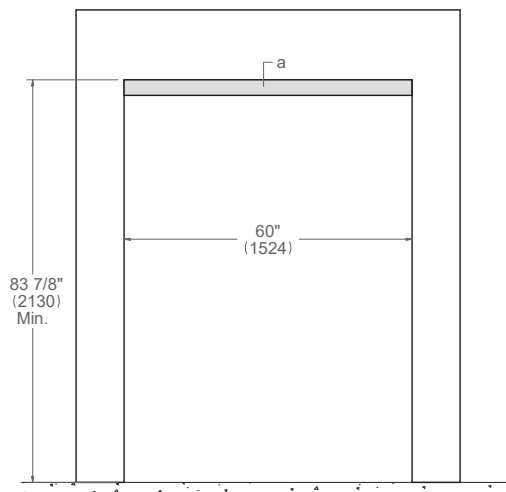

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# 66" Triple Configurations





## Flush installation



### POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23  
REF18FCPIX(L/R)/23  
REF18WCPIX(L/R)/23


REF30RCPR(L/R)/23  
REF18FCIPR(L/R)/23  
REF18WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

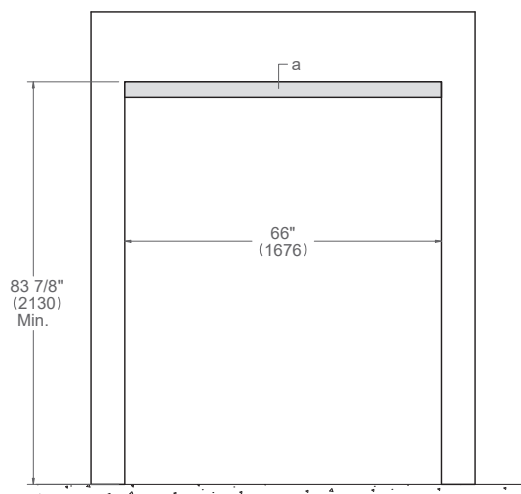

a: Area to be left clear for the anti-tipping brackets – 66"x4" (1676x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# 72" Triple Configurations





## Flush installation



### POSSIBLE COMBINATIONS

REF24RCPIX(L/R)/23  
REF24FCPIX(L/R)/23  
REF24WCPIX(L/R)/23


REF24RCPR(L/R)/23  
REF24FCIPR(L/R)/23  
REF24WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

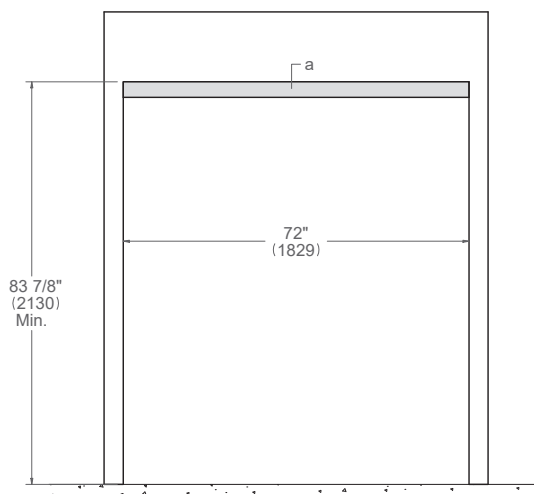

a: Area to be left clear for the anti-tipping brackets – 72"x4" (1829x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.



# 78" Triple Configurations





## Flush installation



### POSSIBLE COMBINATIONS

REF30RCPIX(L/R)/23  
REF24FCPIX(L/R)/23  
REF24WCPIX(L/R)/23


REF30RCPR(L/R)/23  
REF24FCIPR(L/R)/23  
REF24WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

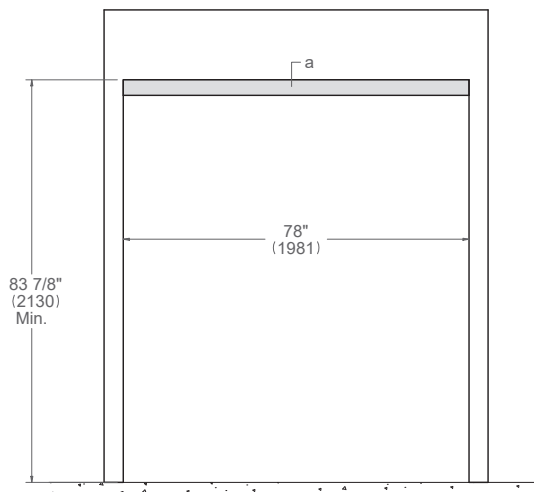

a: Area to be left clear for the anti-tipping brackets – 78"x4" (1981x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# 84" Triple Configurations


## Flush installation



### POSSIBLE COMBINATIONS


REF36RCPIX(L/R)/23  
REF30FCIPIX(L/R)/23  
REF18WCPIX(L/R)/23

REF36RCPR(L/R)/23  
REF30FCIPR(L/R)/23  
REF18WCPR(L/R)/23





REF30RCPIX(L/R)/23  
REF30FCIPIX(L/R)/23  
REF24WCPIX(L/R)/23

REF30RCPR(L/R)/23  
REF30FCIPR(L/R)/23  
REF24WCPR(L/R)/23



REF36RCPIX(L/R)/23  
REF24FCIPIX(L/R)/23  
REF24WCPIX(L/R)/23


REF36RCPR(L/R)/23  
REF24FCIPR(L/R)/23  
REF24WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

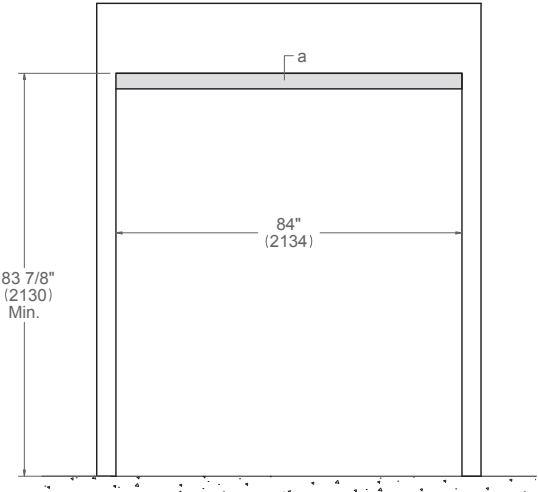

a: Area to be left clear for the anti-tipping brackets – 84"x4" (2134x100mm)  
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.  
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


# 90" Triple Configurations

## Flush installation






### POSSIBLE COMBINATIONS <sup>c</sup>

REF36RCPIX(L/R)/23  
REF30FCPIX(L/R)/23  
REF24WCPIX(L/R)/23




REF36RCPR(L/R)/23  
REF30FCIPR(L/R)/23  
REF24WCPR(L/R)/23



### TOP VIEW <sup>b</sup>



### FRONT VIEW

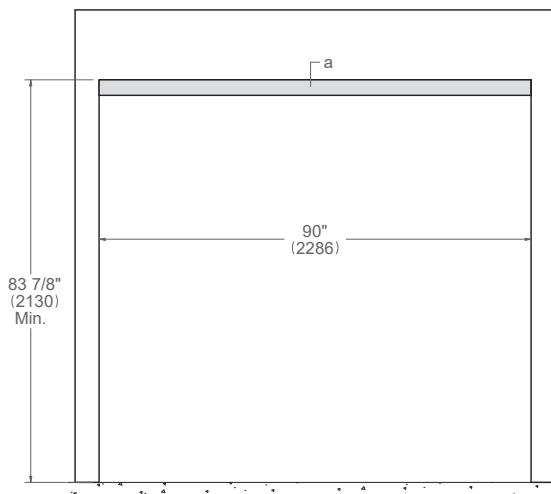

a: Area to be left clear for the anti-tipping brackets – 90"x4" (2286x100mm)

b: Depth includes kitchen cabinet front panel.

c: Optional 42 inch bridge toe kick accessory is available.  
For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


Custom Door Panel



REAR PANEL DRILLING

WINE COLUMN  
DOOR WINDOW  
DIMENSIONS

CUSTOM HANDLES  
MOUNTING AREA

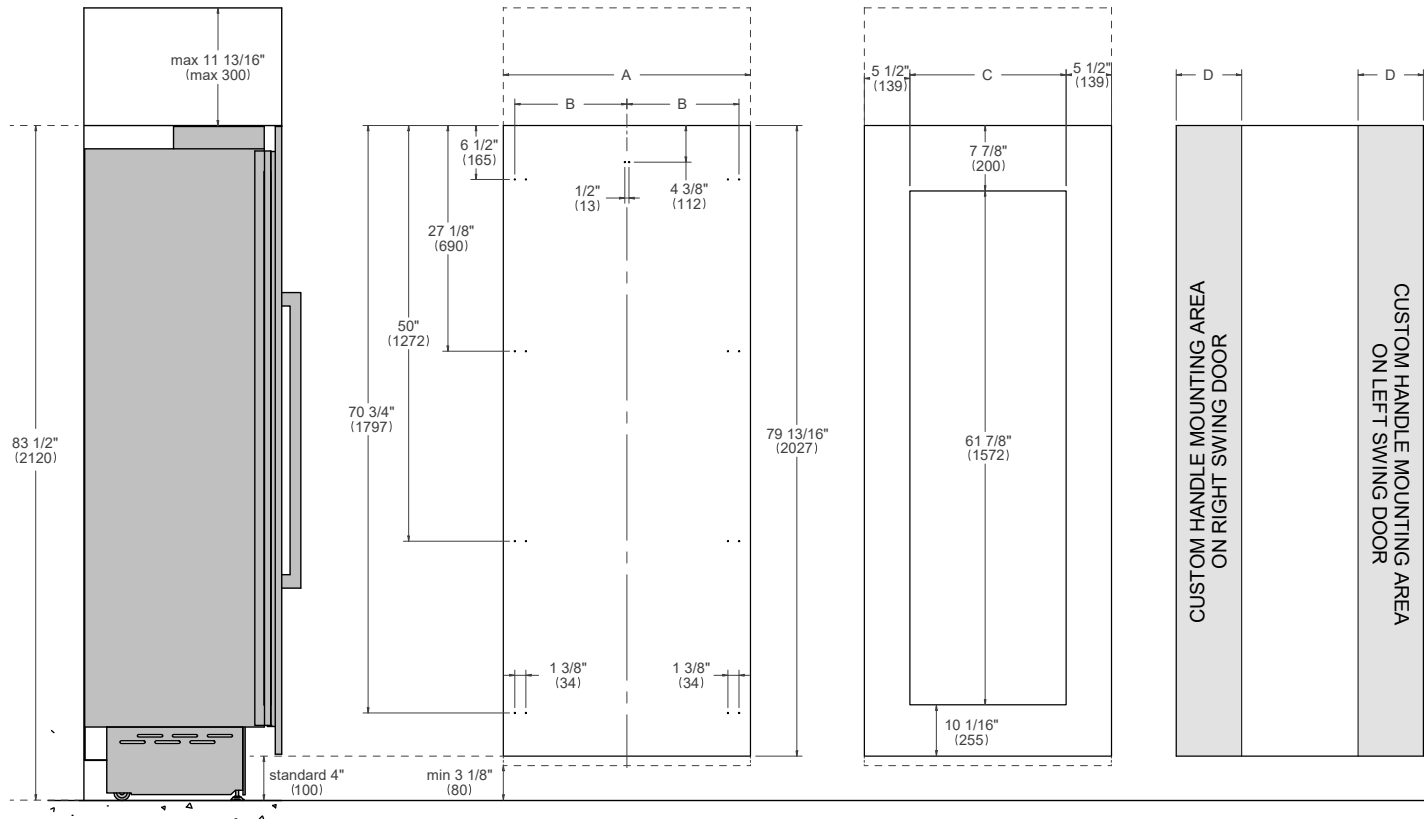


	36"	30"	24"	18"
A	35 3/4" (908)	29 3/4" (756)	23 3/4" (604)	17 3/4" (451)
B	16 1/2" (418)	13 1/2" (343)	10 7/8" (275)	7 7/8" (200)
C	—	—	12 7/8" (327)	6 7/8" (177)
D	7 1/8" (182)	6" (152)	4 3/4" (121)	3 5/8" (92)

Dimensions in parentheses are millimeters unless otherwise specified.  
Minimum gap between custom door panels and adjacent cabinetry is 1/8" (3).


# Recommended Installations



## RECOMMENDED INSTALLATIONS

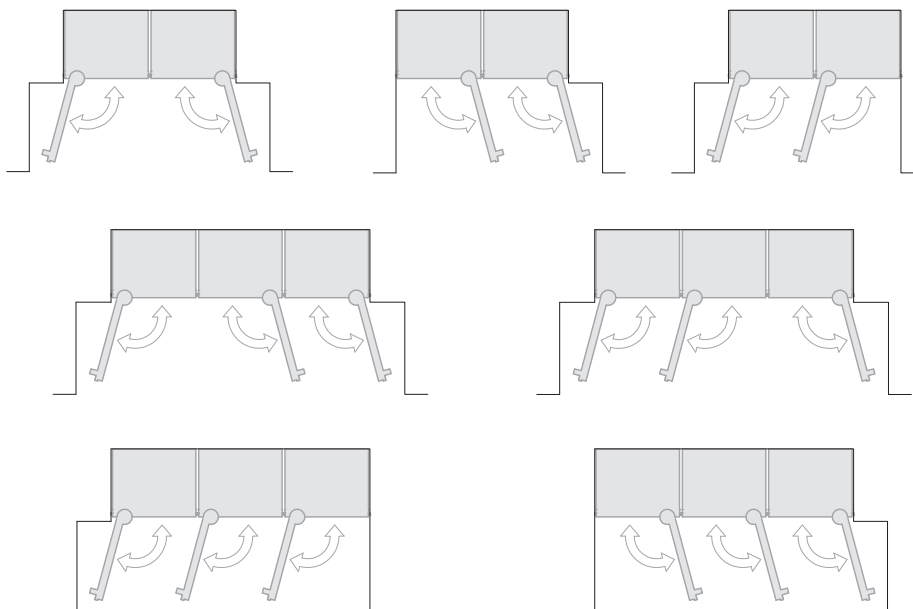


## NOT RECOMMENDED INSTALLATIONS

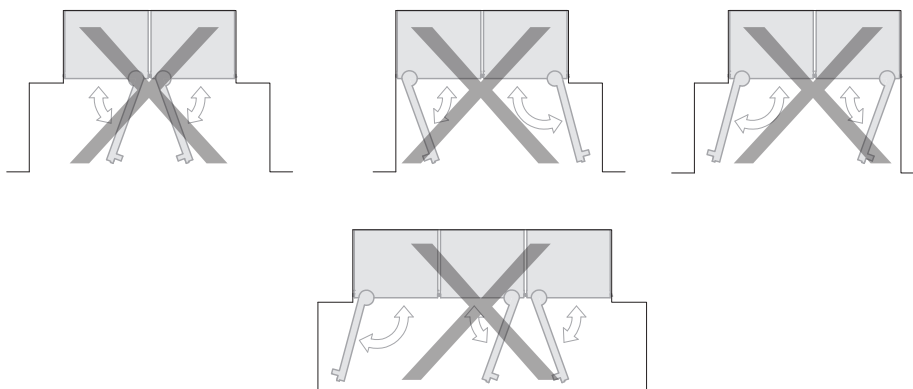


# Refrigeration Handles




**PROFESSIONAL SERIES  
PROHKCOL**




**MASTER SERIES  
MASHKCOL**




**HERITAGE SERIES  
HERHKCOL**



**BERTAZZONI HANDLES  
DRILLING ON RIGHT SWING DOOR**

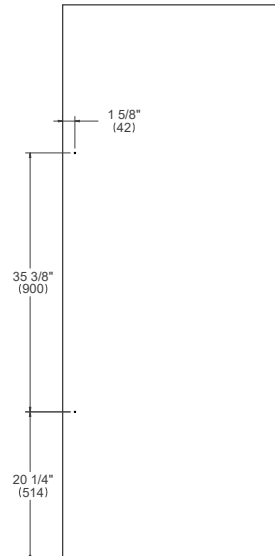

**BERTAZZONI HANDLES  
DRILLING ON LEFT SWING DOOR**

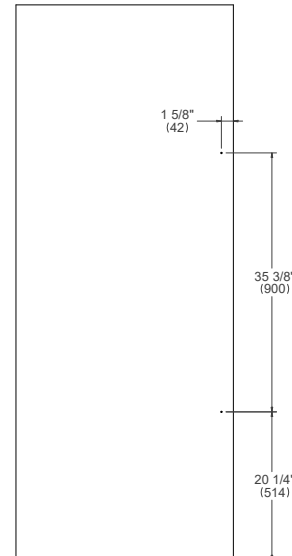

## HANDLE INSTALLATION ON CUSTOM PANELS



In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

# Toekick Panel

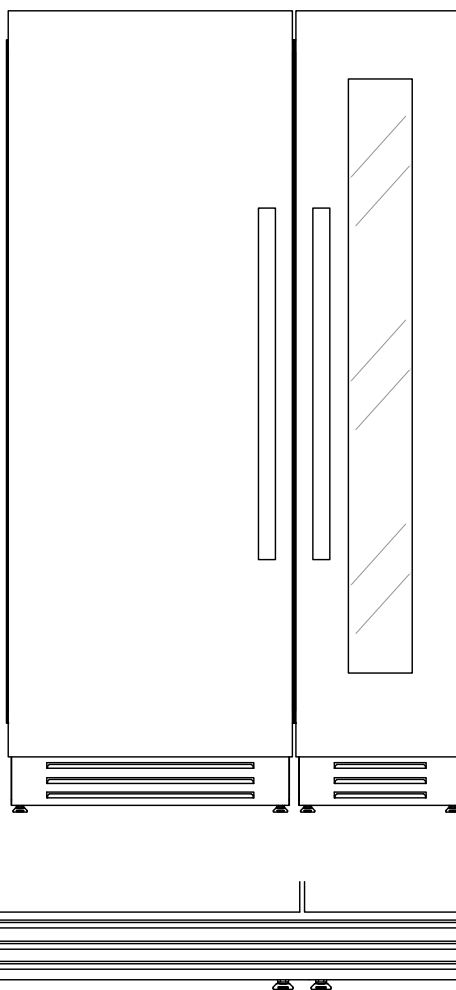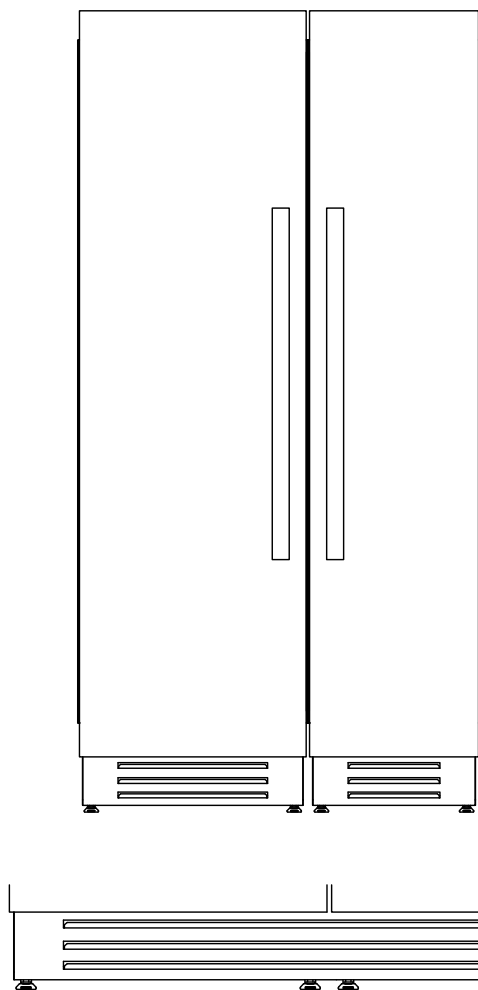

**Part number 901560**

**Part number 901561**

Installation of multiple column units with a continuous cabinet toe kick are possible. Details are provided in the Bertazzoni Columns installation manual.

# BUILT-IN BOTTOM MOUNT REFRIGERATORS




These refrigerators from the T tier are masterpieces of design, styled to reflect Bertazzoni's meticulous attention to detail. They are practical, too - incorporating the latest technology to retain the nutritional value, vitamins, minerals, and texture of your food for longer. Designed for true flush installation in a standard depth cabinet, they are available in both stainless steel and panel-ready models for a seamless installation with any adjacent cabinetry and can be installed side-by-side, doubling your refrigerator space.

Add the finishing touch with Professional, Master, or Heritage Series handles to match the other appliances in your kitchen.

The side-by-side installation kit lets you create clean lines in your kitchen. "Lift and swing" hinges are available on 36" and 30" models to allow a minimal vertical gap of 1/8" between adjacent front cabinet panels.

36"  
Panel Installed and  
Panel Ready



30"  
Panel Installed and  
Panel Ready









# 36" Bottom Mount Panel Installed

## Dimensions



REF36BMBIXLT left hinge

REF36BMBIXRT right hinge


### Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

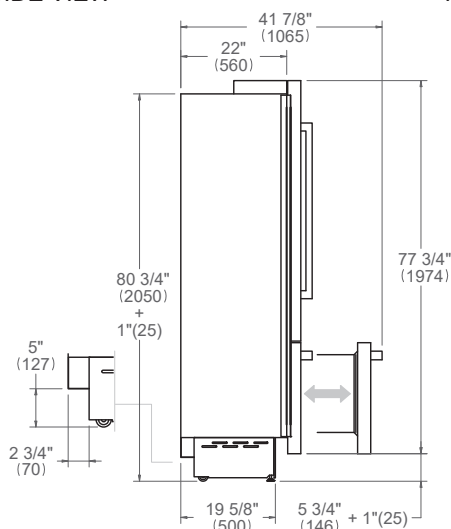


FRONT VIEW

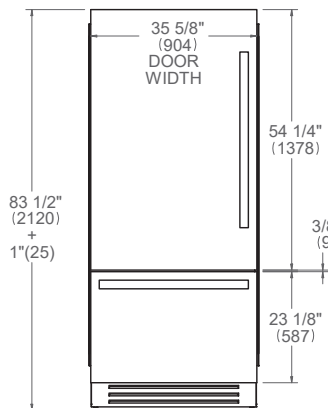


TOP VIEW

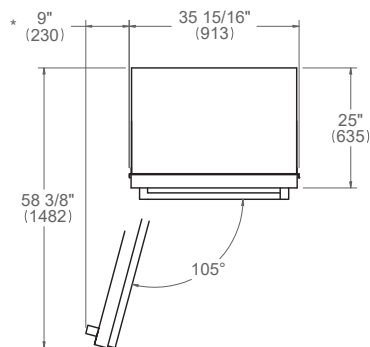


SIDE VIEW

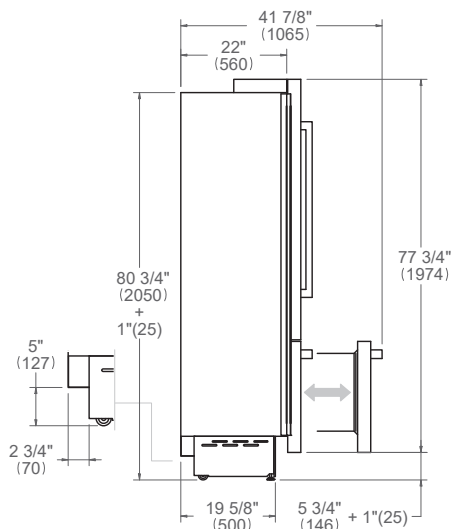

FRONT VIEW

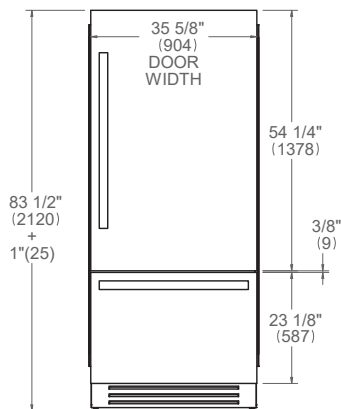

TOP VIEW

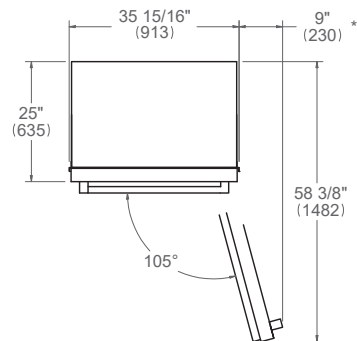

\* Maximum Overall Handle Dimension  
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Bottom Mount Panel Installed

## Installation requirements



### CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg )
------------------------	-------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    550 W    4.8 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Bottom Mount Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

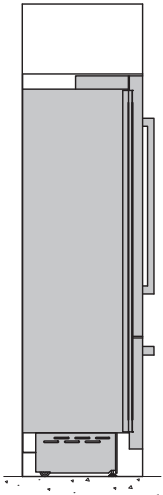

FRONT VIEW

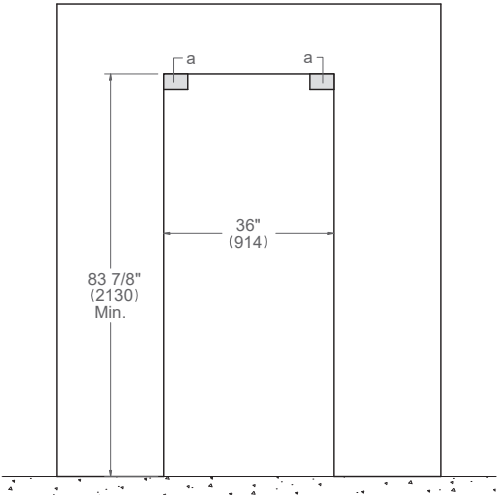

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

# 36" Bottom Mount Panel Ready

## Dimensions



REF36BMBIPLT left hinge  
REF36BMBIPRT right hinge


### Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

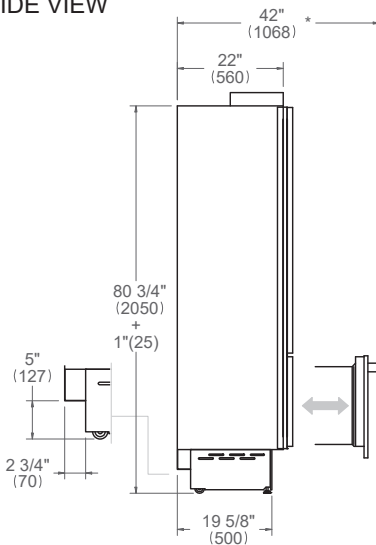


FRONT VIEW

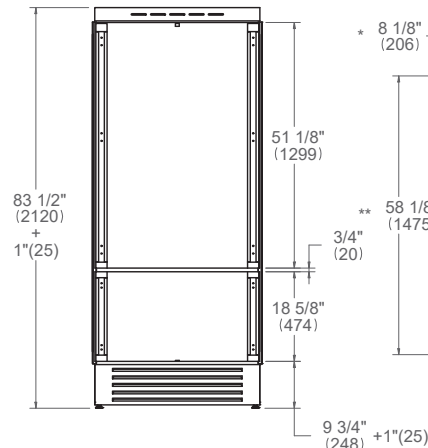


TOP VIEW

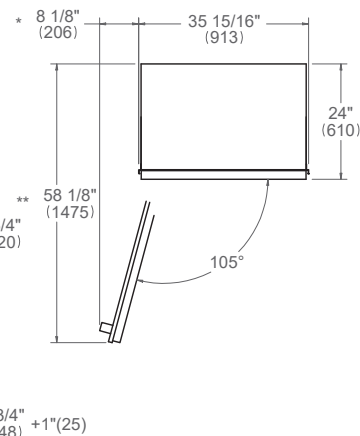


SIDE VIEW

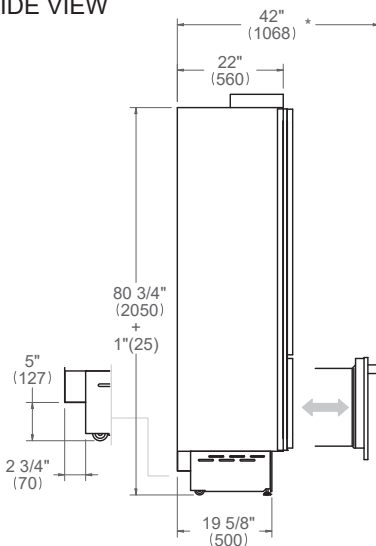

FRONT VIEW

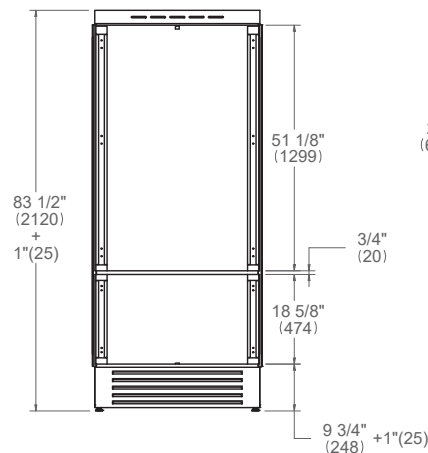

TOP VIEW

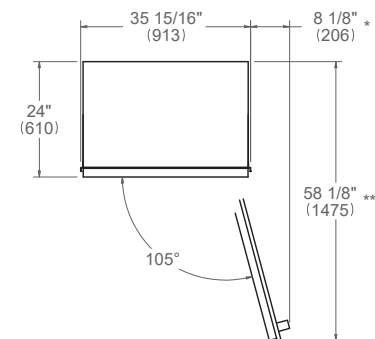

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 99

For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Bottom Mount Panel Ready

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1532 lb (695 kg)
------------------------	------------------


For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.  
Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 550 W 4.8 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord


### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Bottom Mount Panel Ready


## Flush installation

TOP VIEW<sup>b</sup>

SIDE VIEW

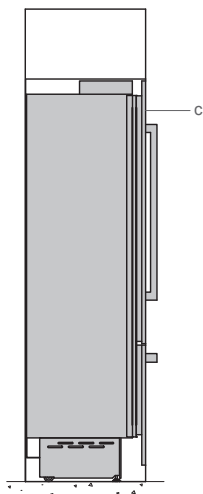

FRONT VIEW

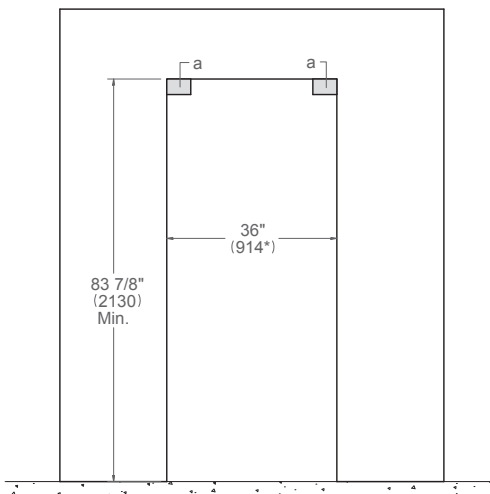

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

\* 36 1/8" (917) for framed-in installation.





# 30" Bottom Mount Panel Installed

## Installation requirements



### CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 470 W 4.1 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Bottom Mount Panel Installed


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW



FRONT VIEW

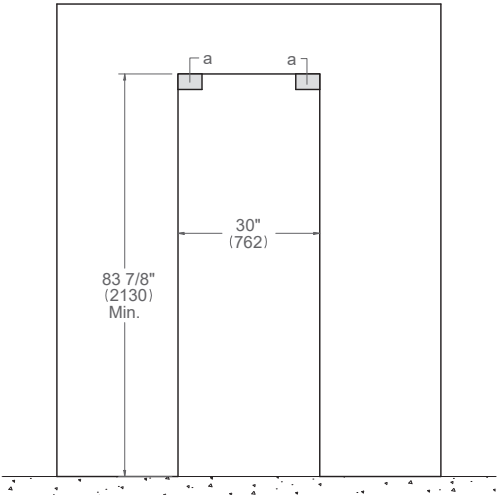

(a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

# 30" Bottom Mount Panel Ready

## Dimensions



REF30BMBIPLT left hinge  
REF30BMBIPRT right hinge


### Handle choices

Professional Series: PROHK30PI


Master series: MASHK30PI

Heritage Series: HERHK30PI


SIDE VIEW

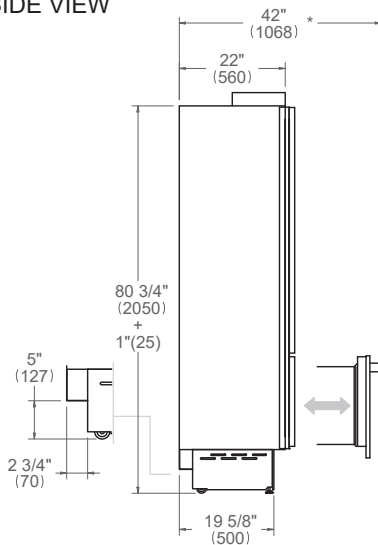


FRONT VIEW

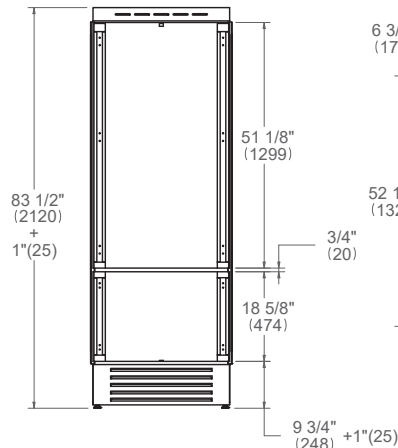


TOP VIEW




SIDE VIEW

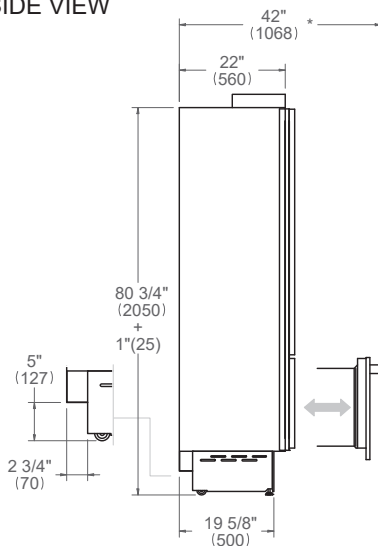

FRONT VIEW

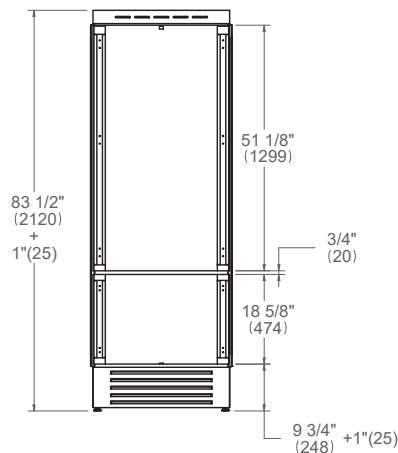

TOP VIEW



\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 99

For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Bottom Mount Panel Ready

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1257 lb (570 kg)
------------------------	------------------


For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.  
Panel can have thickness ranging between 3/4" (19 mm) and 1 1/8" (28 mm).

### ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 470 W 4.1 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 98" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Bottom Mount Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

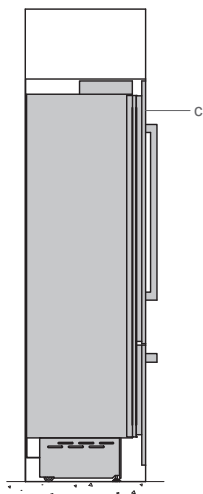

FRONT VIEW

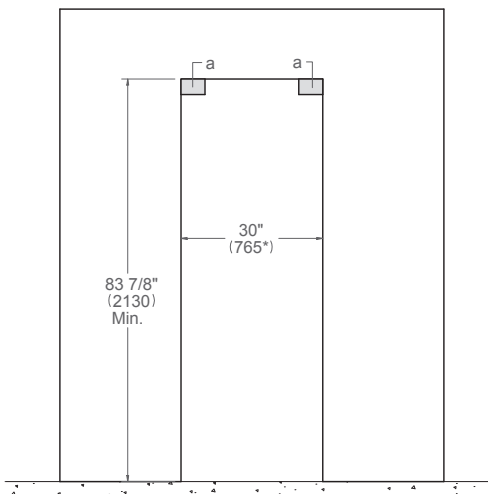

- (a) Area to be left clear for the anti-tipping brackets – 5 1/2" x 4" (140x100 mm)
- (c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

\* 30 1/8" (765) for framed-in installation.

---

## BOTTOM MOUNT MULTIPLE INSTALLATIONS







# Bottom Mount Multiple Installations

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 51 pounds (23 kg) for door panel and 25 pounds (11 kg) for drawer panel.

Panel can have thickness ranging between  $\frac{3}{4}$ " (19 mm) and 1  $\frac{1}{8}$ " (28 mm).


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a  $\frac{1}{4}$ " waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is  $\frac{3}{4}$ " diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.




# 60" Bottom Mount Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS

REF30BMBIXRT  
REF30BMBIXLT




REF30BMBIPRT  
REF30BMBIPLT



REF30BMBIXRT  
REF30BMBIXRT

REF30BMBIPRT  
REF30BMBIPRT




REF30BMBIXLT  
REF30BMBIXLT

REF30BMBIPLT  
REF30BMBIPLT

### TOP VIEW <sup>b</sup>



### FRONT VIEW

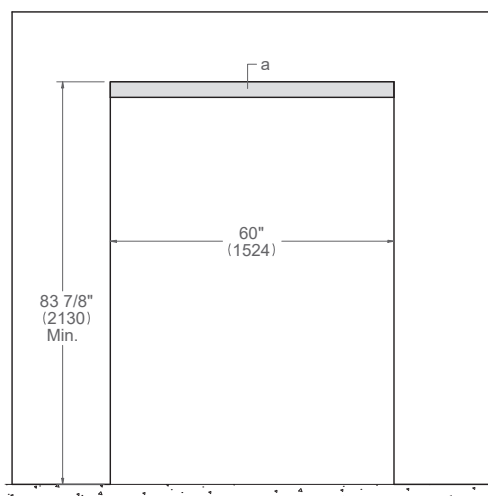

a Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.




# 66" Bottom Mount Double Configurations


## Flush installation

### POSSIBLE COMBINATIONS


REF30BMBIXRT  
REF36BMBIXLT  
REF30BMBIXLT  
REF36BMBIXRT  
REF30BMBIPRT  
REF36BMBIPLT  
REF30BMBIPLT  
REF36BMBIPRT



REF30BMBIXRT  
REF36BMBIXRT  
REF30BMBIPRT  
REF36BMBIPRT




REF30BMBIXLT  
REF36BMBIXLT  
REF30BMBIPLT  
REF36BMBIPLT



### TOP VIEW <sup>b</sup>



### FRONT VIEW

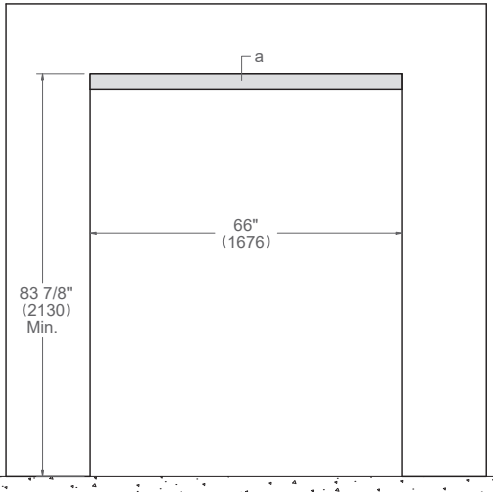

a Area to be left clear for the anti-tipping brackets – 66"x4" (1676x100mm)  
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


# 72" Bottom Mount Double Configurations

## Flush installation



POSSIBLE COMBINATIONS


REF36BMBIXRT  
REF36BMBIXLT  
  
REF36BMBIPRT  
REF36BMBIPLT



REF36BMBIXRT  
REF36BMBIXRT  
  
REF36BMBIPRT  
REF36BMBIPRT




REF36BMBIXLT  
REF36BMBIXLT  
  
REF36BMBIPLT  
REF36BMBIPLT



TOP VIEW <sup>b</sup>



FRONT VIEW

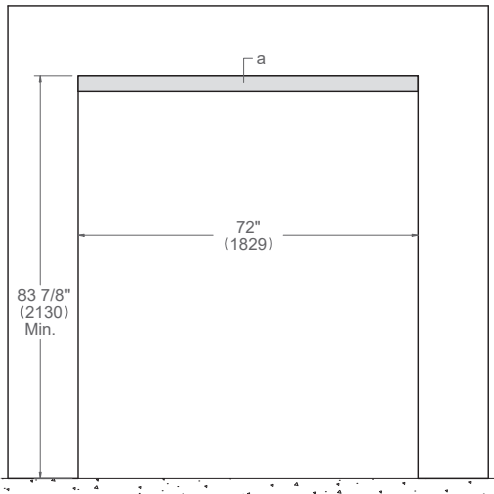

a Area to be left clear for the anti-tipping brackets – 72"x4" (1829x100mm)  
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


# 48" Double Configurations\*

## Flush installation




### POSSIBLE COMBINATIONS °


REF30BMBIPRT  
REF18WCPRL




REF30BMBIPLT  
REF18WCPRR



### TOP VIEW °



### FRONT VIEW

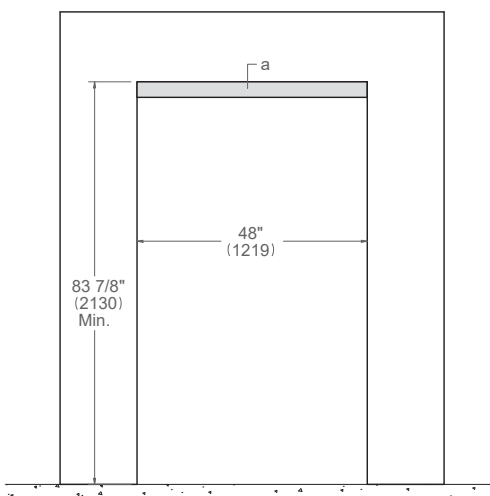

a: Area to be left clear for the anti-tipping brackets – 48"x4" (1219x100mm)

b: Depth includes kitchen cabinet front panel.

c: Optional 48 inch bridge toe kick accessory is available.  
For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


# 54" Double Configurations\*

## Flush installation




### POSSIBLE COMBINATIONS


REF30BMBIPRT  
REF24WCPRL




REF30BMBIPLT  
REF24WCPRR



REF36BMBIPRT  
REF18WCPRL




REF36BMBIPLT  
REF18WCPRR



### TOP VIEW <sup>b</sup>



### FRONT VIEW

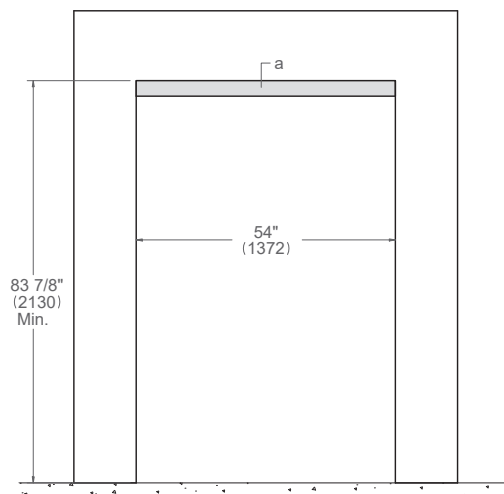

a Area to be left clear for the anti-tipping brackets – 54"x4" (1372x100mm)

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.


# 60" Double Configurations\*

## Flush installation




### POSSIBLE COMBINATIONS

REF36BMBIPRT  
REF24WCPRL




REF36BMBIPLT  
REF24WCPRR



### TOP VIEW <sup>b</sup>



### FRONT VIEW

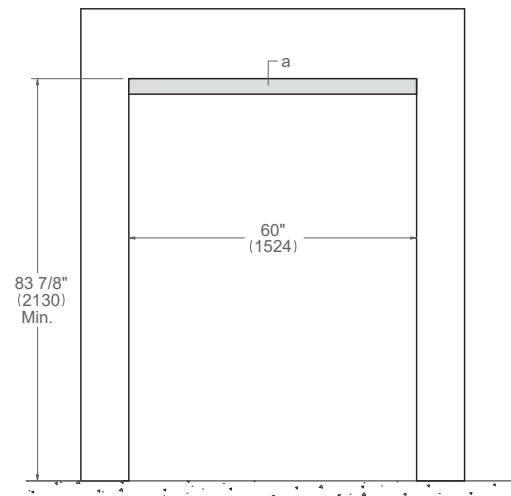

a: Area to be left clear for the anti-tipping brackets – 60"x4" (1524x100mm)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.


All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# Custom Door Panel



## REARPANELDRILLING

## CUSTOM HANDLES MOUNTING AREA

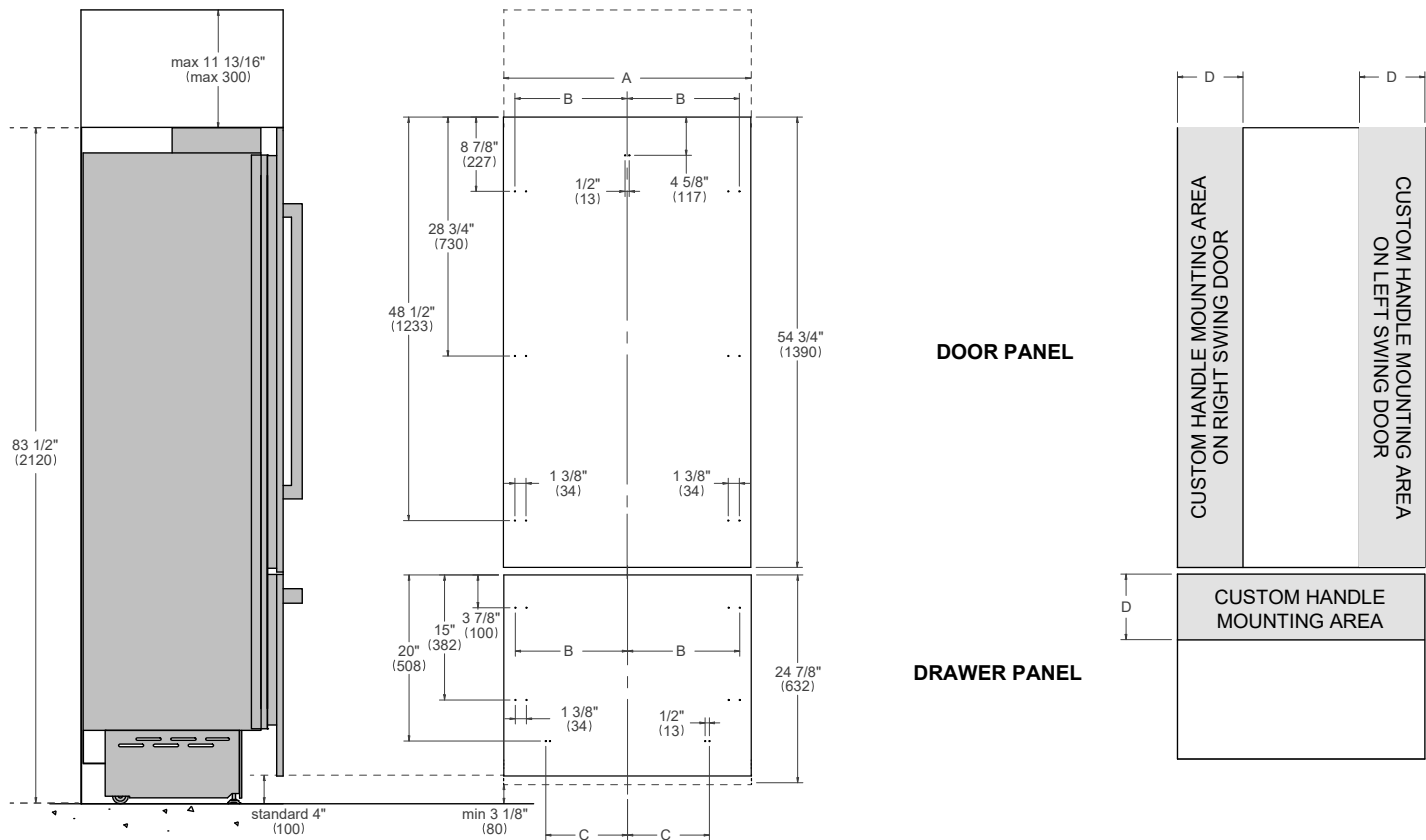


	36"	30"
A	35 3/4" (908)	29 3/4" (756)
B	16 1/2" (418)	13 1/2" (343)
C	14" (354.5)	11" (279.5)
D	7 1/8" (182)	6" (152)

Dimensions in parentheses are millimeters unless otherwise specified.  
Minimum gap between custom door panels and adjacent cabinetry is 1/8" (3).


# Bottom Mount Refrigeration Handles




## PROFESSIONAL SERIES PROHK36PI PROHK30PI




### BERTAZZONI HANDLES DRILLING ON RIGHT SWING REFRIGERATOR DOOR

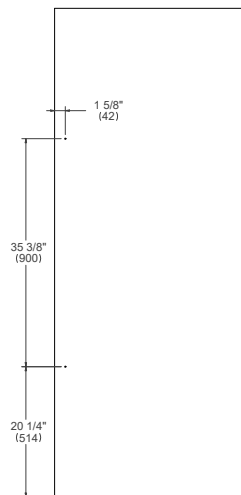


## MASTER SERIES MASHK36PI MASHK30PI



### BERTAZZONI HANDLES DRILLING ON LEFT SWING REFRIGERATOR DOOR

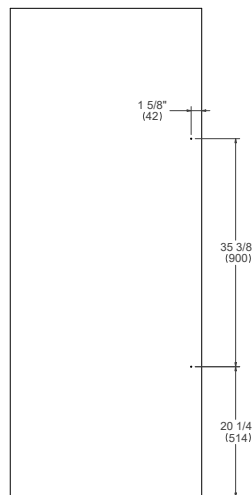

## HERITAGE SERIES HERHK36PI HERHK30PI



## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.


Dimensions in parentheses are millimeters unless otherwise specified.




# Bottom Mount Refrigeration Handles




## PROFESSIONAL SERIES PROHK36PI PROHK30PI




## MASTER SERIES MASHK36PI MASHK30PI




## HERITAGE SERIES HERHK36PI HERHK30PI



## BERTAZZONI HANDLES DRILLING ON 30" (75CM) FREEZER DRAWER

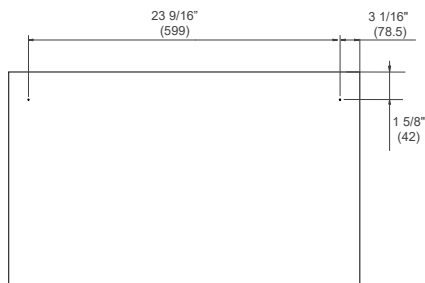

## BERTAZZONI HANDLES DRILLING ON 36" (90CM) FREEZER DRAWER

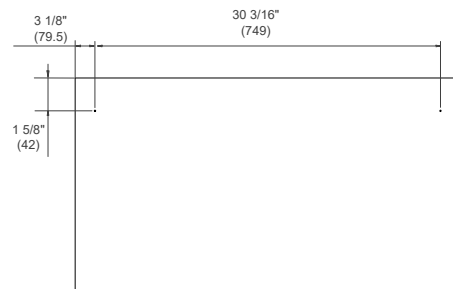

## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

---

# V TIER LINE UP



---

# BUILT-IN REFRIGERATOR COLUMNS



## BUILT-IN COLUMNS

Experience the ultimate design and technology with Bertazzoni's V tier columns. These masterpieces of style boast high-quality materials and attention to detail in all respects.

The reversible panel-ready doors<sup>(\*)</sup> are mounted on cutting-edge Hettich hinges, providing a seamless and weightless range of motion. With versatile installation options, you can create elegant configurations of the refrigerator, freezer and wine columns.

You can also customize your columns with optional stainless panels, handles, and finishes, available for every Series.

---

30"-24"  
Panel Ready



---

(\*) Exept 18" models.




# 30" Refrigerator Column Panel Ready

## Dimensions




REF30RCBPNV reversible hinges


SIDE VIEW

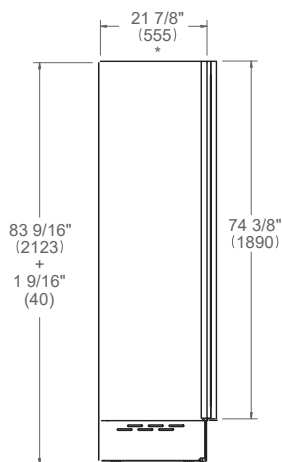


FRONT VIEW

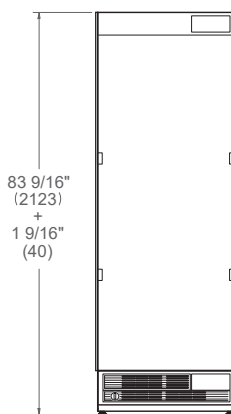


TOP VIEW

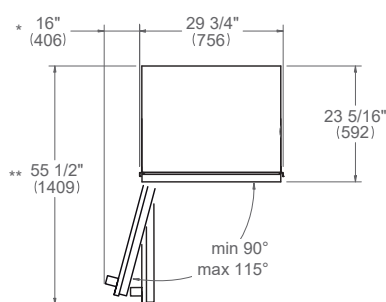


SIDE VIEW

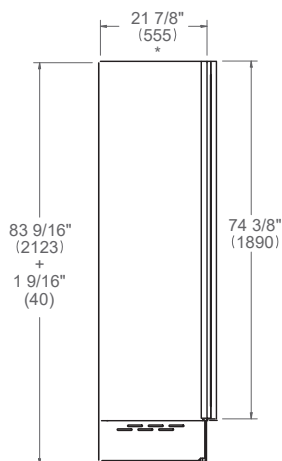

FRONT VIEW

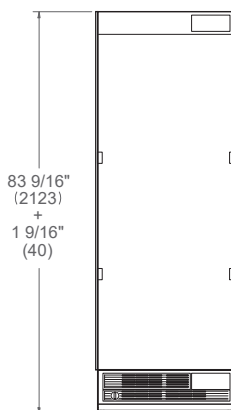

TOP VIEW

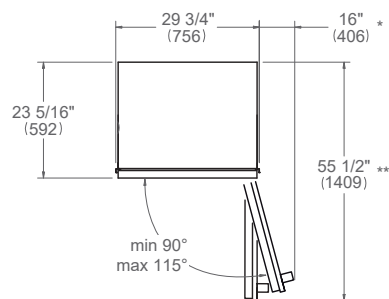

\* Depth without door

\*\* Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 116

For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU # SP30CX.

A matching Carbonio panel kit is available - SKU # SP30CC.

# 30" Refrigerator Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

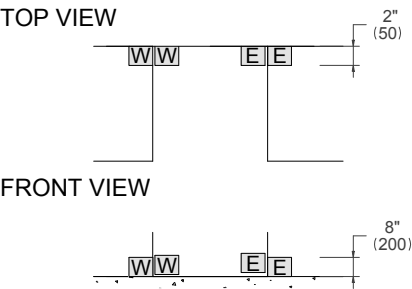

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    112 W    2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENT

Bertazzoni Refrigerator Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.

Dimensions in parentheses are millimeters unless otherwise specified.




# 30" Refrigerator Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

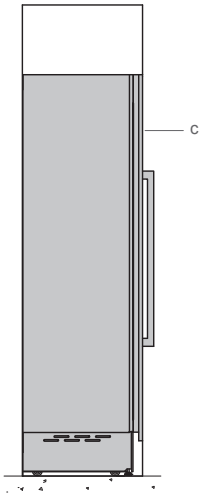

FRONT VIEW

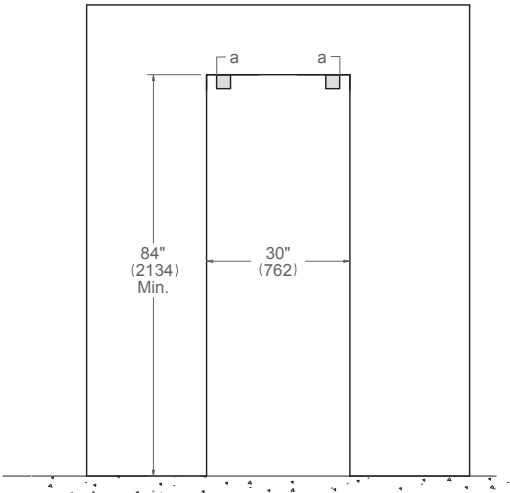

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 24" Refrigerator Column Panel Ready

## Dimensions




REF24RCBPNV reversible hinges


SIDE VIEW

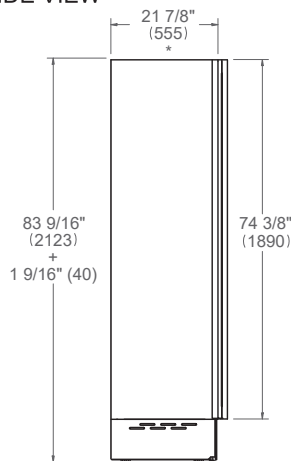


FRONT VIEW

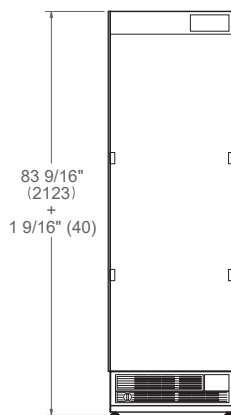


TOP VIEW

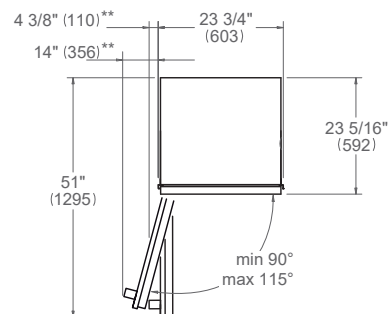


SIDE VIEW

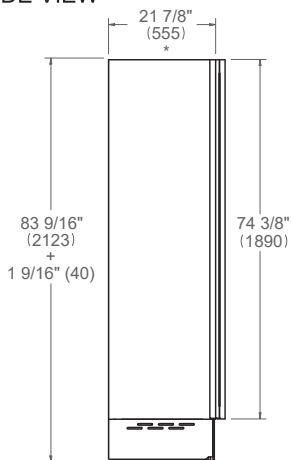

FRONT VIEW

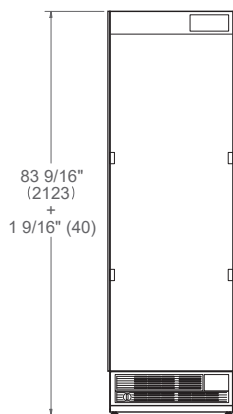

TOP VIEW

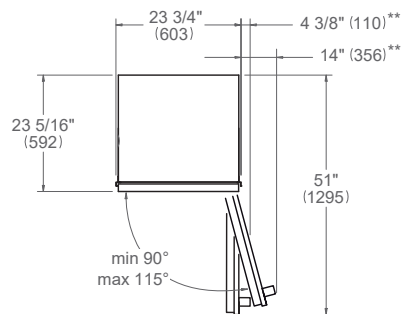

\* Depth without door

\*\* Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 139

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU # SP24CX.

A matching Carbonio panel kit is available - SKU # SP24CC.



# 24" Refrigerator Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

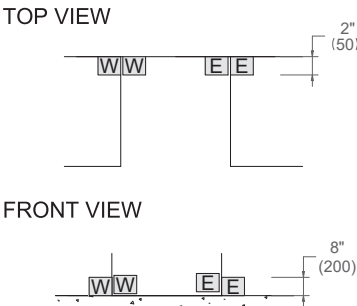

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    112 W    2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENT

Bertazzoni Refrigerator Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit. The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Refrigerator Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>

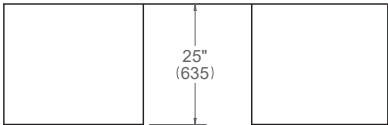

SIDE VIEW

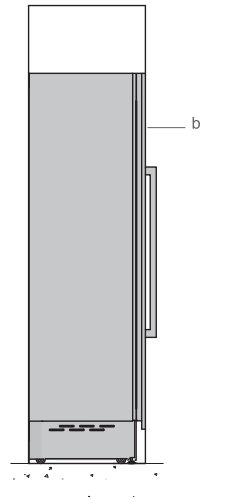

FRONT VIEW

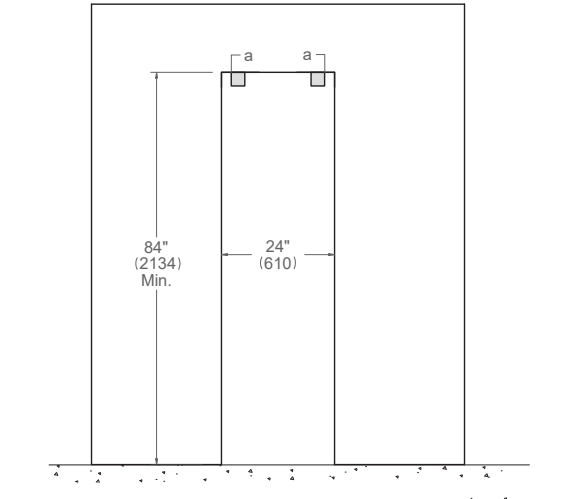

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

# BUILT-IN FREEZER COLUMNS



24"-18"  
Panel Ready






# 24" Freezer Column Panel Ready

## Dimensions




REF24FCBIPNV


SIDE VIEW

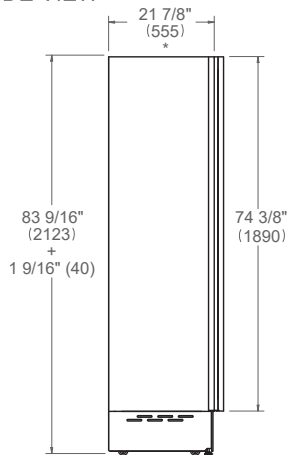


FRONT VIEW

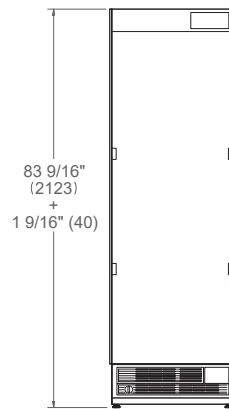


TOP VIEW

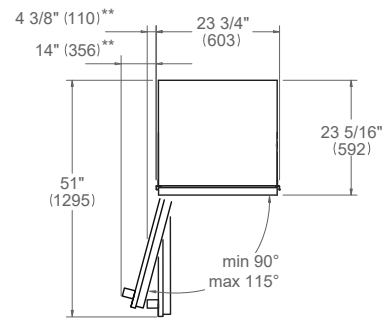


SIDE VIEW

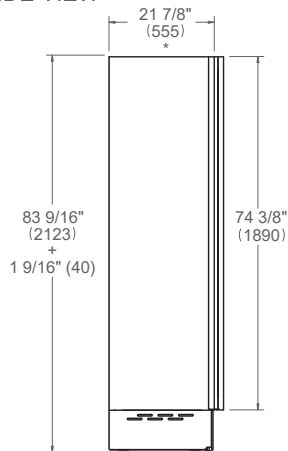

FRONT VIEW

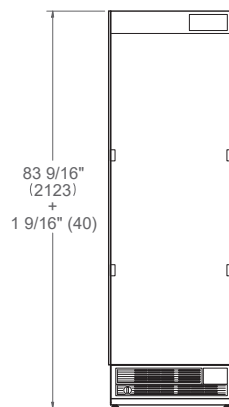

TOP VIEW

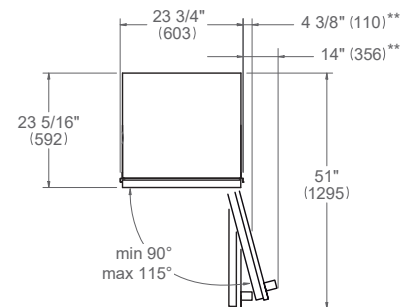

\* Depth without door

\*\* Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 139

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU # SP24CX.

A matching Carbonio panel kit is available - SKU # SP24CC.

# 24" Freezer Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 160 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Freezer Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>

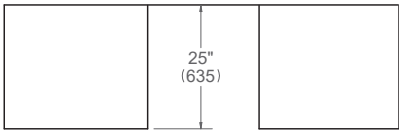

SIDE VIEW

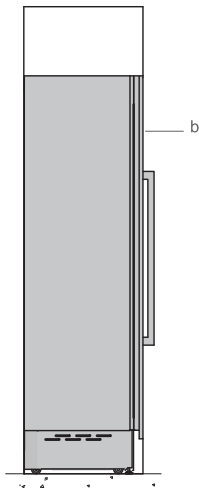

FRONT VIEW

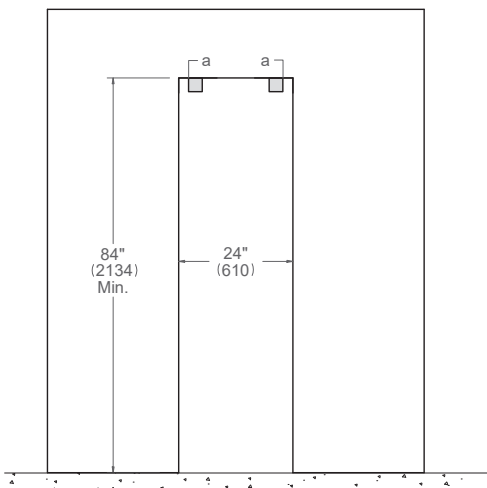

(a) Anti-tipping brackets included with appliance – 4"x3/16"

(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


# 18" Freezer Column Panel Ready

## Dimensions




REF18FCBIPRV left hinge  
REF18FCBIPRV right hinge


SIDE VIEW

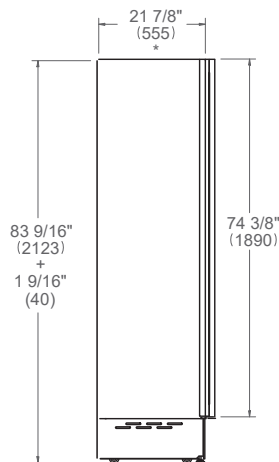


FRONT VIEW

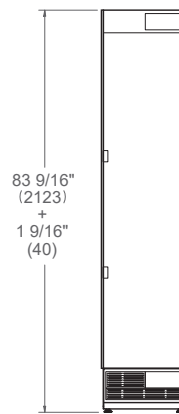


TOP VIEW




SIDE VIEW

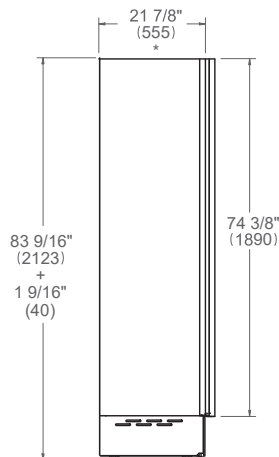

FRONT VIEW

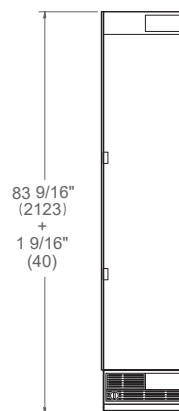

TOP VIEW



\* Depth without door

\*\* Maximum Overall Handle Dimension, 3/4" (19) Door Panel thickness

For custom panel dimensions see page 116

For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU # SP18CX.

A matching Carbonio panel kit is available - SKU # SP18CC.



# 18" Freezer Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

For instructions of product combinations please see the Multiple Installation Section (page 112).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

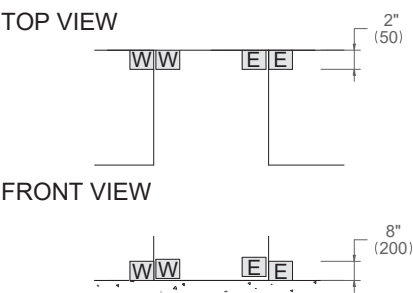

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 160 W 2 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Freezer Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

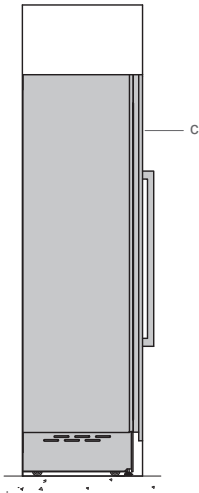

FRONT VIEW

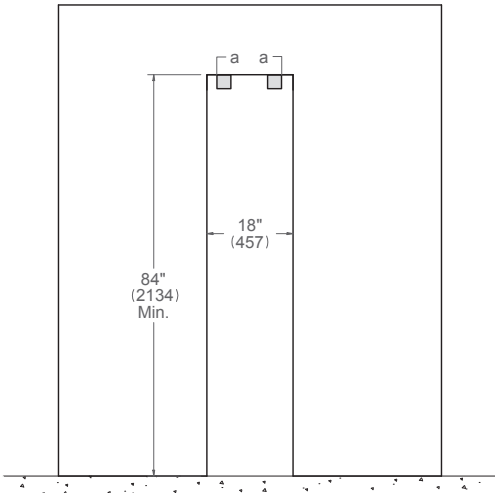

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

# BUILT-IN WINE COLUMNS



24" - 18"  
Panel Ready






# 24" Wine Column Panel Ready

## Dimensions




REF24WCBPNV


SIDE VIEW

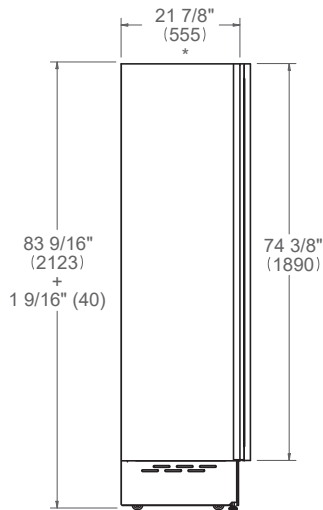


FRONT VIEW

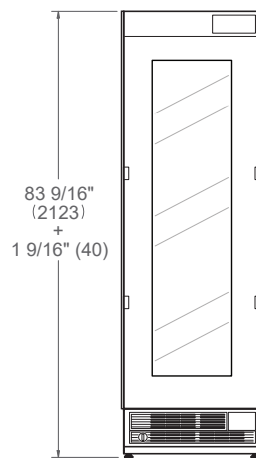


TOP VIEW

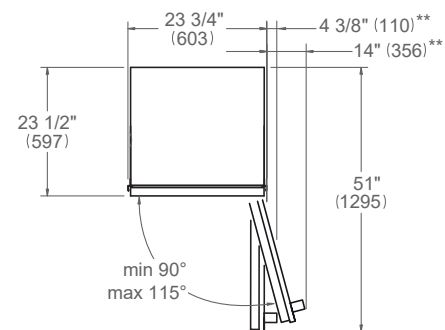


SIDE VIEW

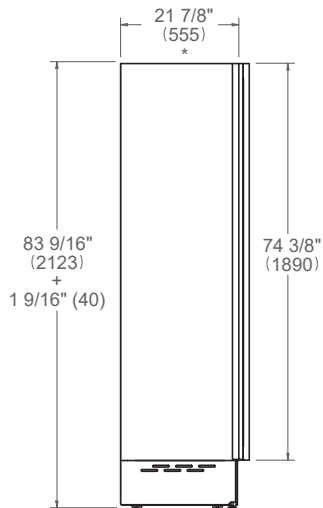

FRONT VIEW

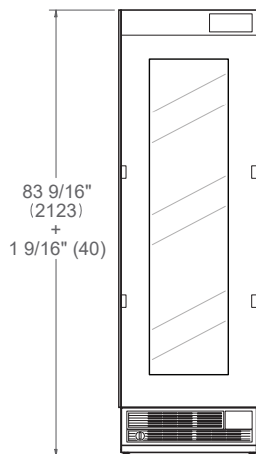

TOP VIEW

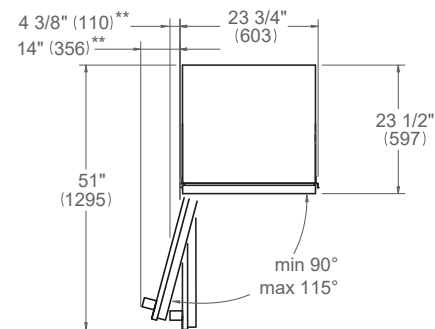

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 139

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU #SP24WXV.

A matching Carbonio panel kit is available - SKU # SP24WCC.

# 24" Wine Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 3/4" (19 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

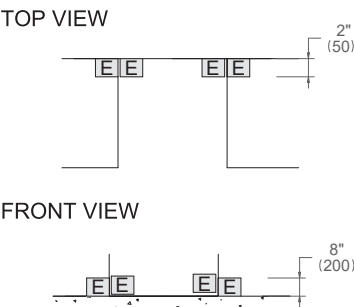

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 150 W 1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 24" Wine Column Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>

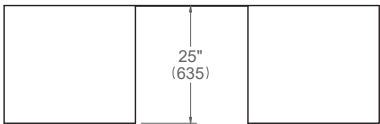

SIDE VIEW

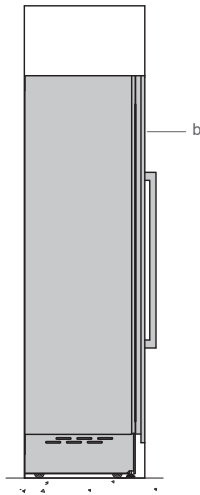

FRONT VIEW

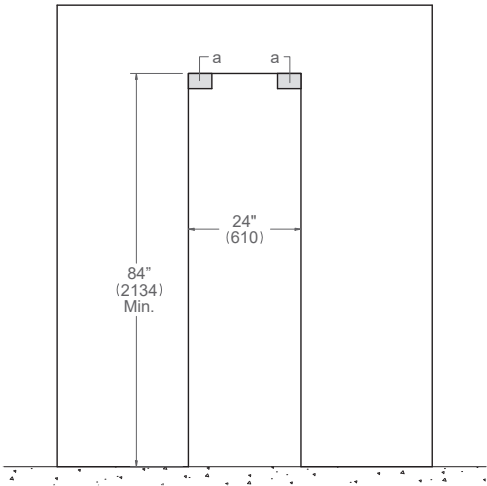

(a) Anti-tipping brackets included with appliance – 4" x 3/16"  
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.


# 18" Wine Column Panel Ready

## Dimensions




REF18WCBPLV left hinge  
REF18WCBPRV right hinge


SIDE VIEW

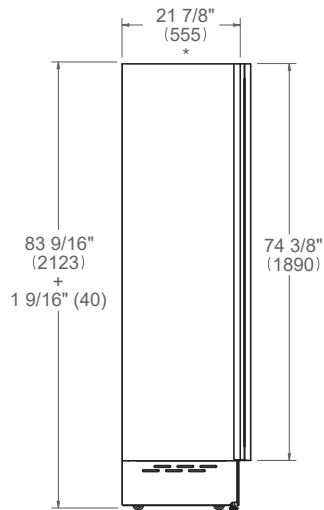


FRONT VIEW

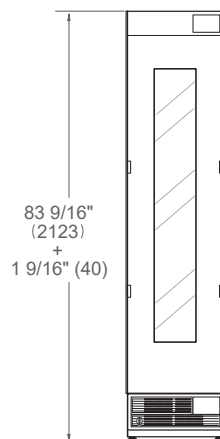


TOP VIEW




SIDE VIEW

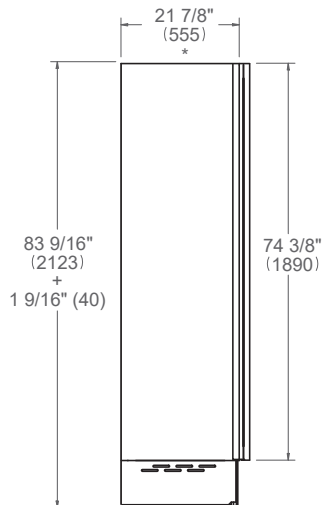

FRONT VIEW

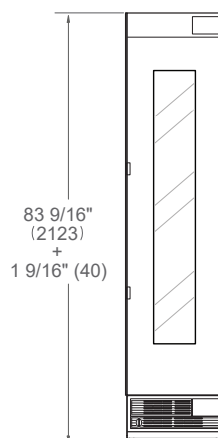

TOP VIEW



\* Maximum Overall Handle Dimension

\*\*  $\frac{3}{4}"$  (19mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 139

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available – SKU #SP18WXV.

A matching Carbonio panel kit is available - SKU # SP18WCC.



# 18" Wine Column Panel Ready

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 3/4" (19 mm).

For instructions of product combinations please see the Multiple Installation Section (page 59).

### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	1200 lb (544 kg)
------------------------	------------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.

A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

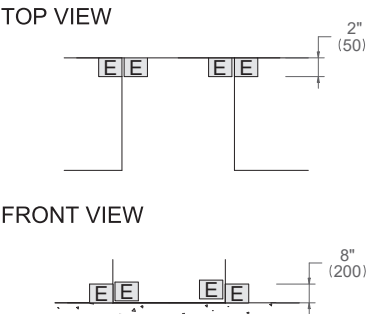

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V    60 Hz    150 W    1.5 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord


Dimensions in parentheses are millimeters unless otherwise specified.

# 18" Wine Column Panel Ready


## Flush installation




TOP VIEW <sup>b</sup>

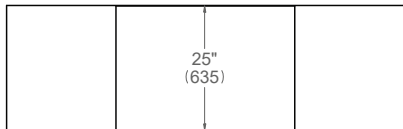

SIDE VIEW

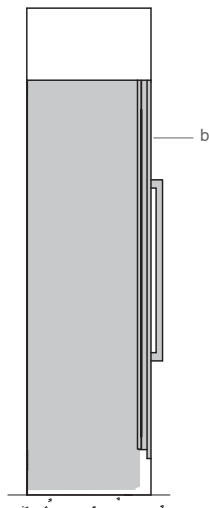

FRONT VIEW

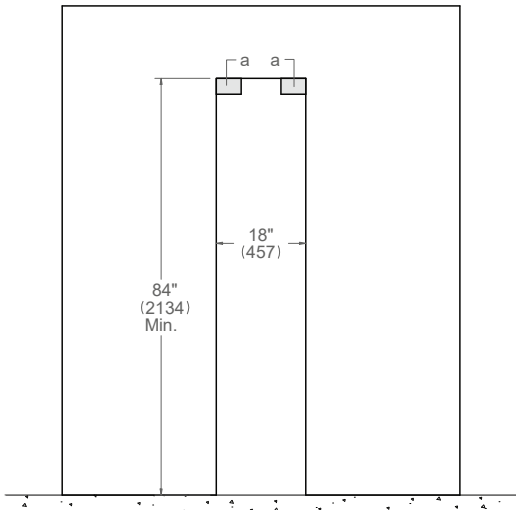

(a) Anti-tipping brackets included with appliance – 4" x 3/16"  
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

---

# COLUMNS MULTIPLE INSTALLATIONS





# Multiple installations

## Installation requirements



### INSTALLATION

All Bertazzoni columns can be installed in a standard 25" depth cutout. Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 66 pounds (30 kg) for door panel. Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24mm).

**For instructions of product combinations please see the Multiple Installation Section (page 112).**

### CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation.

Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

### TOP VIEW



### FRONT VIEW



A separate 15 Amp circuit breaker servicing only these appliances is recommended.

### PLUMBING REQUIREMENTS

Bertazzoni Refrigerator and Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.

The appliances must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.




# 42" Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS <sup>c</sup>


REF24RCBPNV  
REF18FCBIP(L/R)V




REF24RCBPNV  
REF18WCBP(L/R)V



### TOP VIEW <sup>b</sup>



### FRONT VIEW

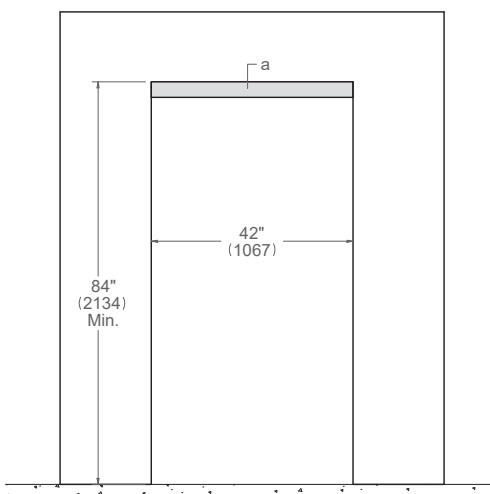

a: Anti-tipping brackets included with appliance – 42"x3/16"  
b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.  
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


# 48" Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS <sup>c</sup>


REF30RCBPNV  
REF18FCBIP(R/L)V




REF24RCBPNV  
REF24FCBIPNV



REF30RCBPNV  
REF18WCBP(L/R)V




REF24RCBPNV  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

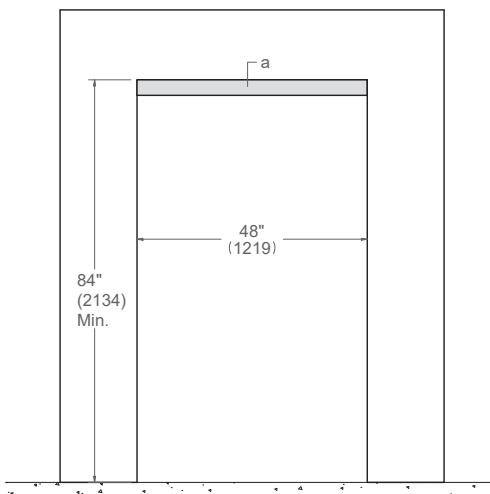

a: Anti-tipping brackets included with appliance – 48"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.

No additional accessories are needed.


# 54" Double Configurations

## Flush installation




### POSSIBLE COMBINATIONS

REF30RCBPNV  
REF24FCBIPNV




REF30RCBPNV  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

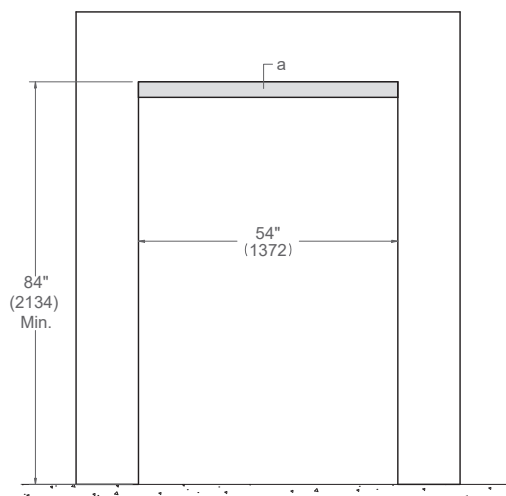

a: Anti-tipping brackets included with appliance – 54"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.







# 60" Triple Configurations

## Flush installation



### POSSIBLE COMBINATIONS


REF24RCBPNV  
REF18FCBIP(L/R)V  
REF18WCBP(L/R)V



### TOP VIEW <sup>b</sup>



### FRONT VIEW

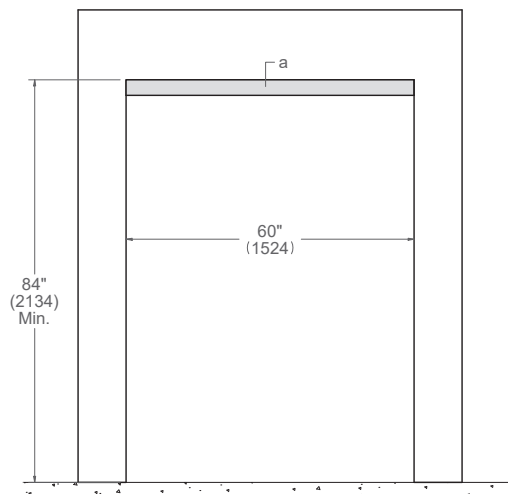

a: Anti-tipping brackets included with appliance – 60"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.



# 66" Triple Configurations

## Flush installation




### POSSIBLE COMBINATIONS


REF30RCBPNV  
REF18FCBIP(L/R)V  
REF18WCBP(L/R)V



REF24RCBPNV  
REF24FCBIPNV  
REF18WCBP(L/R)V




REF24RCBPNV  
REF18FCBIP(L/R)V  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

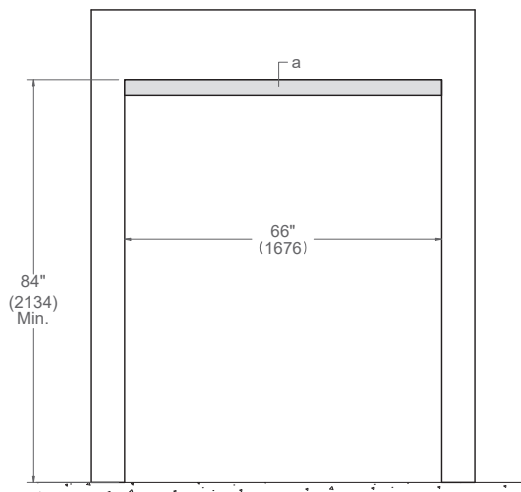

a: Anti-tipping brackets included with appliance – 66"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.


# 72" Triple Configurations

## Flush installation




### POSSIBLE COMBINATIONS



REF30RCBPNV  
REF24FCBIPNV  
REF18WCBP(L/R)V



REF30RCBPNV  
REF18FCBIP(L/R)V  
REF24WCBPNV




REF24RCBPNV  
REF24FCBIPNV  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

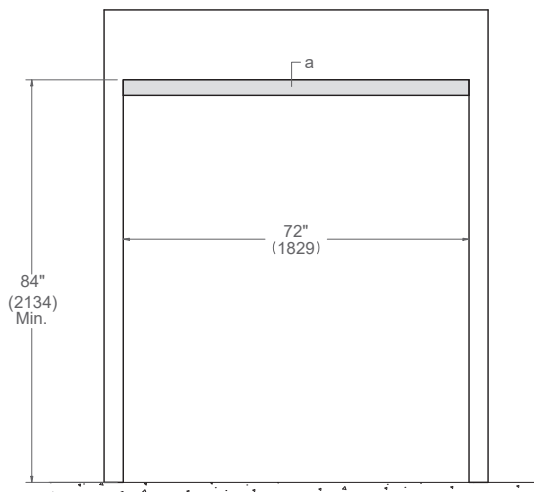

a: Anti-tipping brackets included with appliance – 72"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.





# 78" Triple Configurations

## Flush installation



### POSSIBLE COMBINATIONS


REF30RCBPNV  
REF24FCBIPNV  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

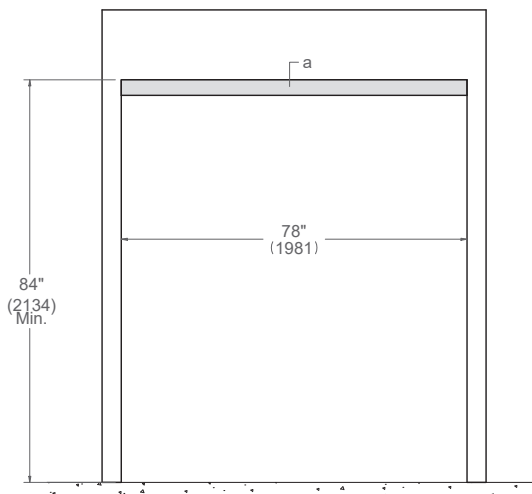

a: Anti-tipping brackets included with appliance – 78"x3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.



All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.  
No additional accessories are needed.

Custom Door Panel



COLUMNS REAR PANEL  
DRILLING

CUSTOM HANDLES  
MOUNTING AREA

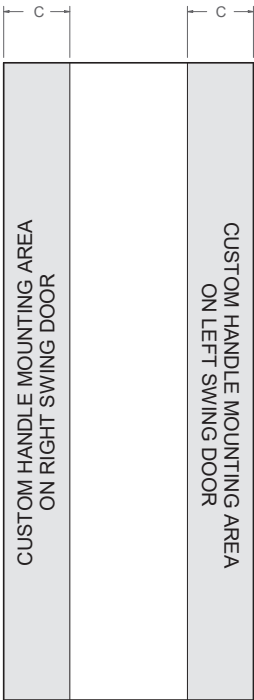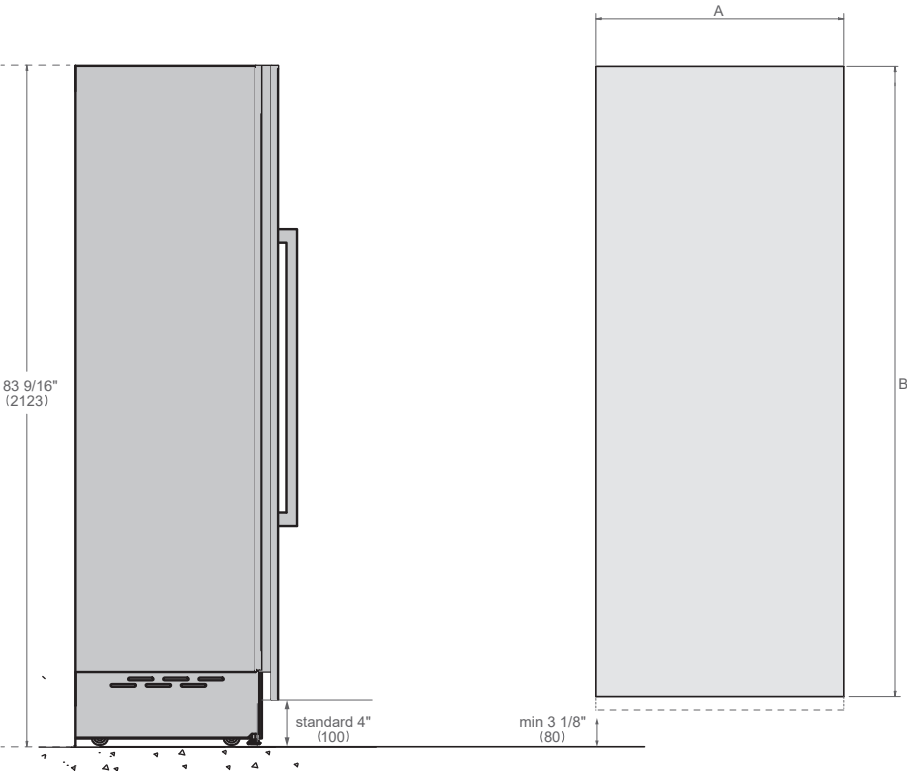

The drilling templates for the panels are included in the refrigerator packaging.


	30"	24"	18"
A	29 3/4" (756)	23 3/4" (603)	17 3/4" (451)
B	79 15/16" (2030)	79 15/16" (2030)	79 15/16" (2030)
C	6" (152)	4 3/4" (121)	3 5/8" (92)

Dimensions in parentheses are millimeters unless otherwise specified.  
Minimum gap between custom door panels and adjacent cabinetry is 1/8" (3).


## Recommended Installations



### RECOMMENDED INSTALLATIONS

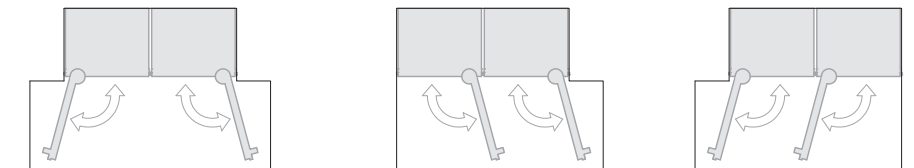


### NOT RECOMMENDED INSTALLATIONS

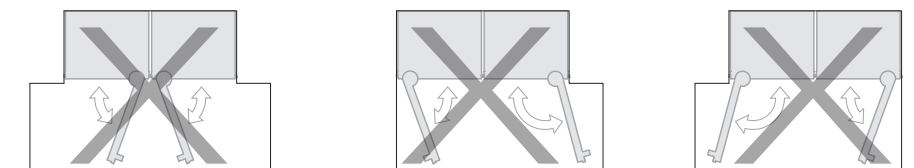


# Refrigeration Handles




**PROFESSIONAL SERIES  
PROHKCOL**




**MASTER SERIES  
MASHKCOL**




**HERITAGE SERIES  
HERHKCOL**



**BERTAZZONI HANDLES  
DRILLING ON RIGHT SWING DOOR**

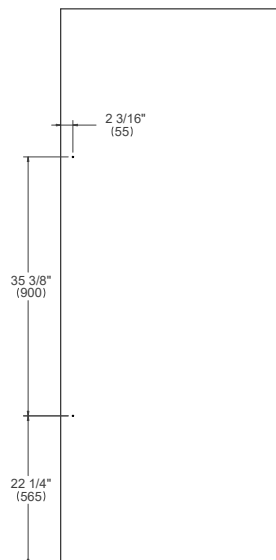

**BERTAZZONI HANDLES  
DRILLING ON LEFT SWING DOOR**

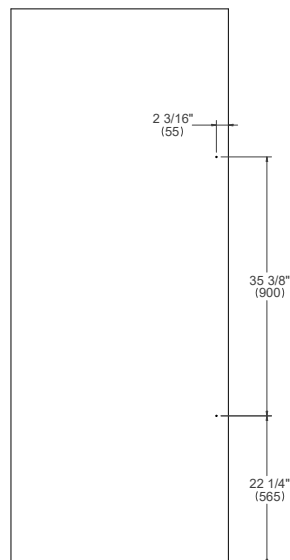

## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit. Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


# BUILT-IN BOTTOM MOUNT AND FRENCH DOOR REFRIGERATORS



Experience the perfect combination of design and technology with Bertazzoni's Premium tier refrigerators. These masterpieces of style reflect our meticulous attention to detail and are designed to retain your food's nutritional value, vitamins, minerals, and texture for longer.

With a true flush installation in a standard depth cabinet and reversible panel-ready doors, they seamlessly integrate with any adjacent cabinetry. You can even install them side-by-side with CTXV connection kit, doubling your refrigerator space. Customize your refrigerators with optional stainless panels and Professional, Master, or Heritage Series handles to match your other kitchen appliances. Our 36" and 30" bottom-mount models and 36" French door refrigerator feature Hettich hinges that allow a minimal vertical gap of 1/8" between adjacent front cabinet panels, creating clean lines in your kitchen.


36"  
French Door



36"  
Panel Ready



30"  
Panel Ready









# 36" French Door Bottom Mount Panel Ready

## Dimensions



REF36FDBZPNV/24


### Handle choices

Professional Series: HK36PROFDBXV


Master series: HK36MASFDBXV

Heritage Series: HK36HERFDBXV


SIDE VIEW

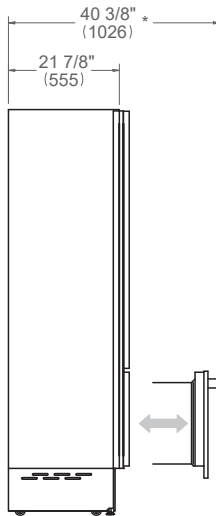

FRONT VIEW

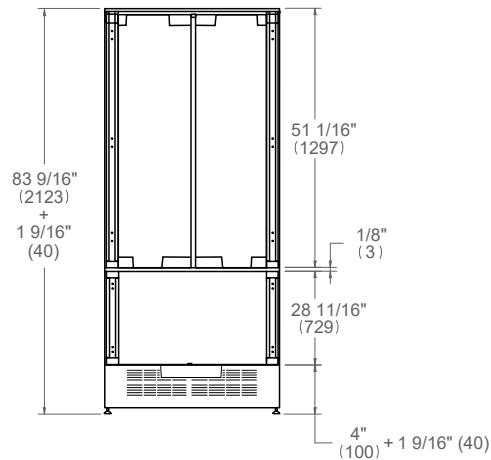

TOP VIEW

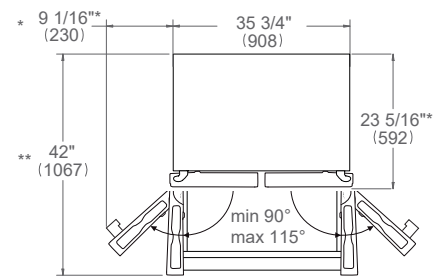

\* Maximum Overall Handle Dimension

\*\* 3/4" (19mm) Door Panel thickness

For custom panel dimensions see page 136

For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available - SKU# SP36FDX/24.

A matching Carbonio panel kit is available - SKU # SP36FDCV

# 36” French Door Bottom Mount Panel Ready

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1200 lb (544 kg)
------------------------	------------------

For panel ready french door refrigerator, do not exceed the maximum weight of 44 pounds (20 kg) for door panels and 20 pounds (9 kg) for drawer panel.  
Panels can have a thickness of 3/4” (19 mm). For a flush installation in 25” deep cabinets, custom door panels should not be thicker than 3/4” (19 mm).

### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

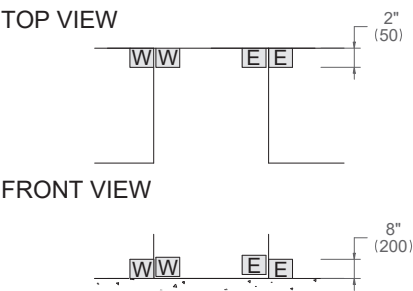

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 120 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 25 to 80 PSI (between 1.7 and 5.5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" French Door Bottom Mount Panel Ready


Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

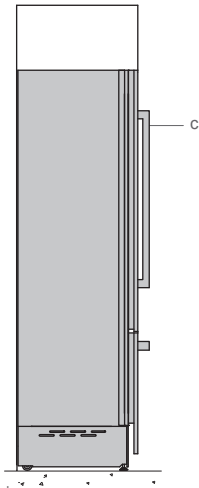

FRONT VIEW

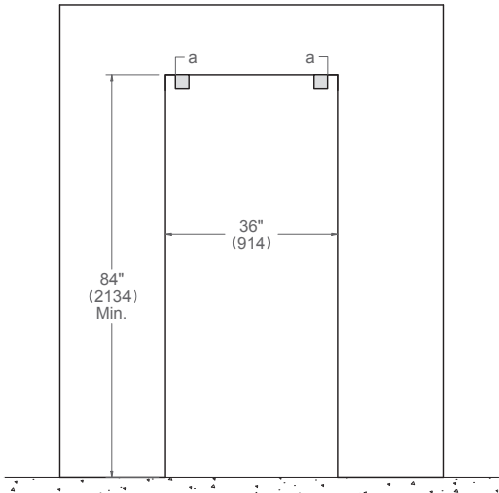

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

# 36" Bottom Mount Panel Ready

## Dimensions



REF36BMBZPNV reversible hinge


### Handle choices

Professional Series: PROHK36PI


Master series: MASHK36PI

Heritage Series: HERHK36PI


SIDE VIEW

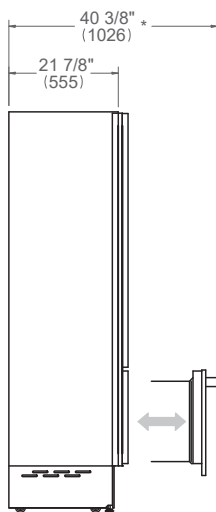


FRONT VIEW

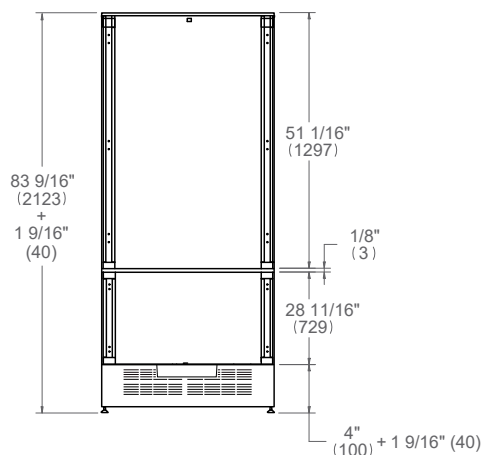


TOP VIEW

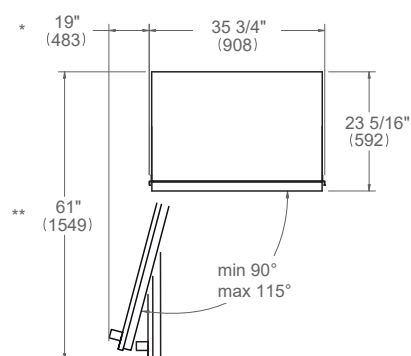


SIDE VIEW

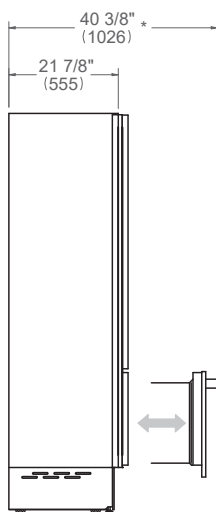

FRONT VIEW

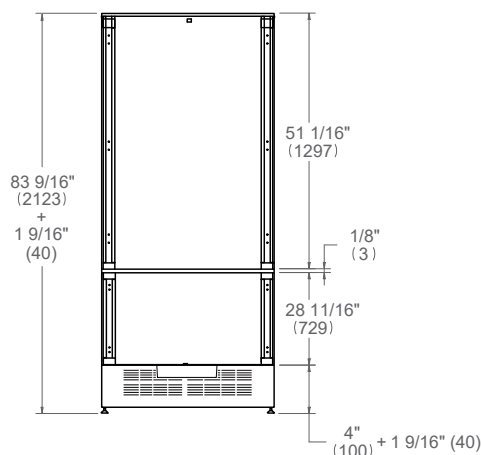

TOP VIEW

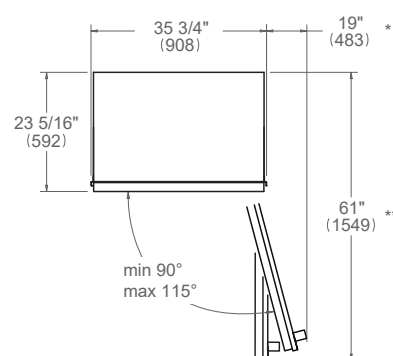

\* Maximum Overall Handle Dimension

\*\* 15/16" (24mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available - SKU # SP36BMX.

# 36" Bottom Mount Panel Ready

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1200 lb (544 kg)
------------------------	------------------

For panel ready bottom mount refrigerator, do not exceed the maximum weight of 35 pounds (16 kg) for door panel and 20 pounds (9 kg) for drawer panel.  
Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).

### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

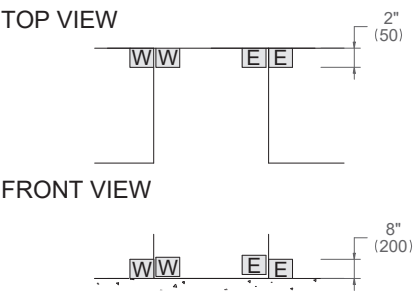

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 120 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 25 to 80 PSI (between 1.7 and 5.5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 36" Bottom Mount Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

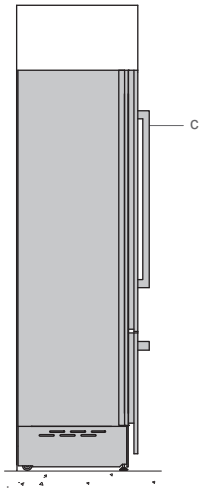

FRONT VIEW

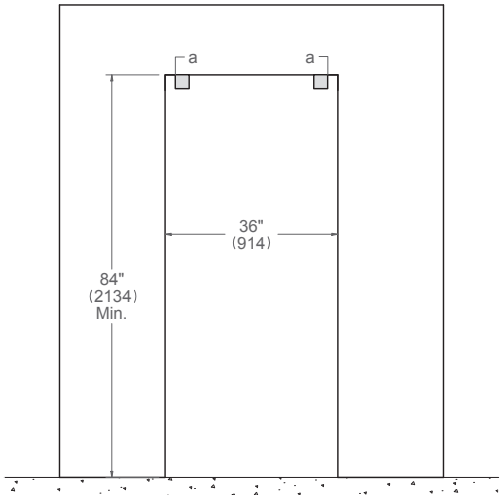

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Bottom Mount Panel Ready

## Dimensions



REF30BMBZPNV reversible hinge

REF30BMBPNB reversible hinge


### Handle choices

Professional Series: PROHK30PI


Master series: MASHK30PI

Heritage Series: HERHK30PI


SIDE VIEW

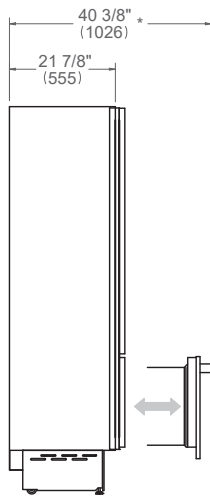


FRONT VIEW

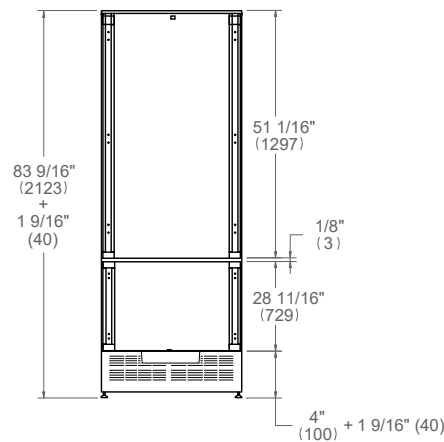


TOP VIEW

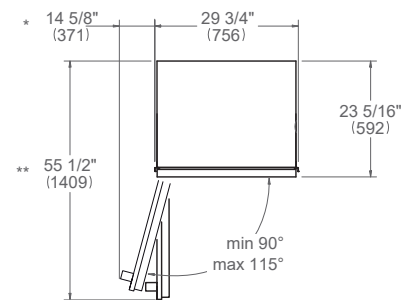


SIDE VIEW

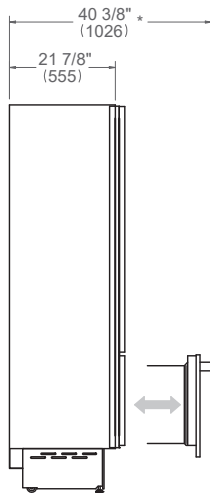

FRONT VIEW

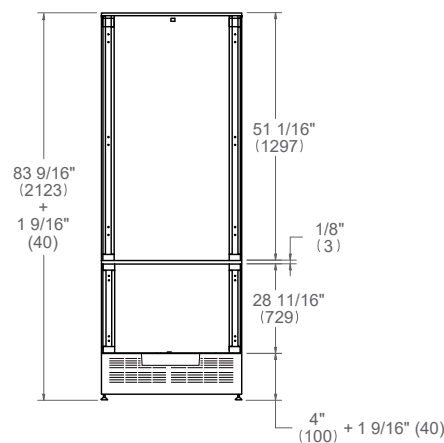

TOP VIEW

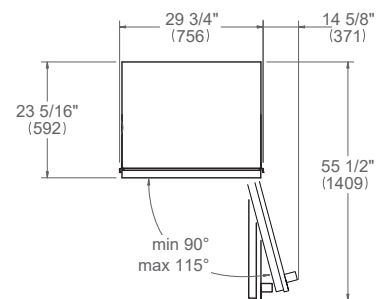

\* Maximum Overall Handle Dimension

\*\* 15/16" (24mm) Door Panel thickness

For custom panel dimensions see page 137

For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.

A matching stainless steel panel kit is available - SKU # SP30BMX.



# 30" Bottom Mount Panel Ready

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.  
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.  
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	1200 lb (544 kg)
------------------------	------------------

For panel ready combi bottom mount, do not exceed the maximum weight of 35 pounds (16 kg) for door panel and 20 pounds (9 kg) for drawer panel.  
For a flush installation, cabinet panels should not be thicker than 15/16" (24 mm).

### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.  
A properly-grounded horizontally-mounted electrical receptacle should be installed.  
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.  
Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

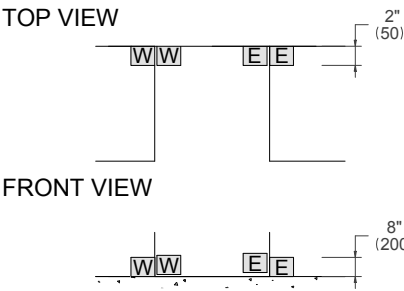

A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	115 V 60 Hz 120 W 3 Amp
Service	15 Amp dedicated circuit
Power Connection	NEMA 5-15P with 90" power cord

### PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.  
The appliance must be connected only to a potable water supply system.  
To connect to water supply system (for appliances equipped with ice maker) a 1/4" waterline with accessible shut-off valve must be supplied.  
The solenoid connection on the appliance is 3/4" diameter but is metric threaded (NPT).  
The system pressure must be between from 25 to 80 PSI (between 1.7 and 5.5 bar). Different pressures can cause malfunctions or leaks in the water system.


Dimensions in parentheses are millimeters unless otherwise specified.

# 30" Bottom Mount Panel Ready


## Flush installation




TOP VIEW<sup>b</sup>



SIDE VIEW

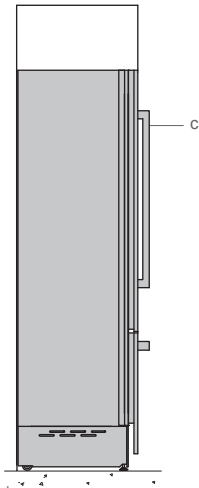

FRONT VIEW

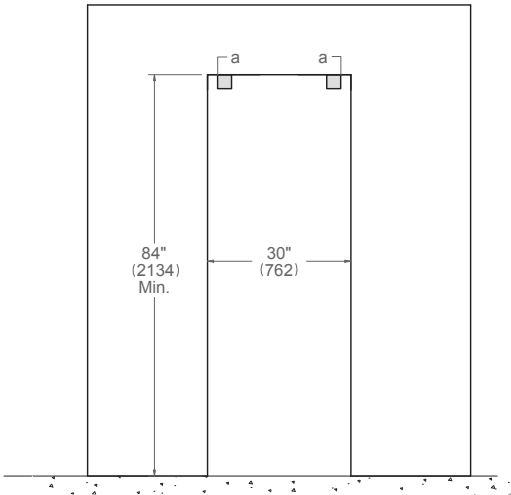

(a) Anti-tipping brackets included with appliance – 4"x3/16"  
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.  
b: depth includes kitchen cabinet front panel.

---

## BOTTOM MOUNTS MULTIPLE INSTALLATIONS







# Bottom Mount Multiple installations

## Installation requirements



### CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 35/44 pounds (16/20 kg) for door panel/s and 20 pounds (9 kg) for drawer panel.

Panels can have a thickness ranging between 3/4" (19 mm) and 1 1/2" (38 mm). For a flush installation in 25" deep cabinets, custom door panels should not be thicker than 15/16" (24 mm).


### ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally-mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

### TOP VIEW



### FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

### PLUMBING REQUIREMENT

The appliances must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with water dispenser), use a 1/4" waterline with accessible shut-off valve.

The system pressure must be between from 25 PSI to 80 PSI (between 1.7 and 5.5 Bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see the product spec sheet.

# 60" Bottom Mount Double Configurations




## Flush installation



### POSSIBLE COMBINATIONS

REF30BMBZPNV  
REF30BMBZPNV


REF30BMBPNB  
REF30BMBPNB



### TOP VIEW <sup>b</sup>



### FRONT VIEW

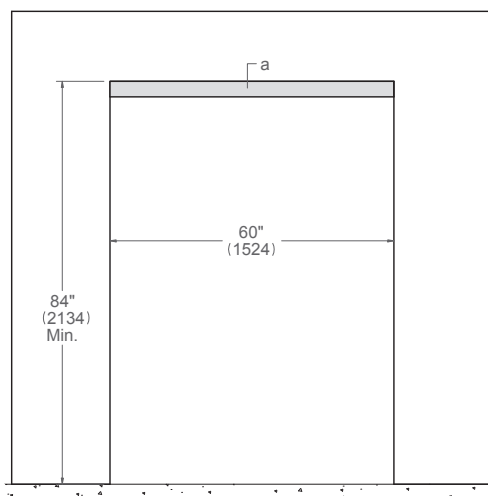

a Anti-tipping brackets included with appliance – 60"x3/16"

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


# 66" Bottom Mount Double Configurations

## Flush installation



### POSSIBLE COMBINATIONS


REF30BMBZPNV  
REF36BMBZPNV

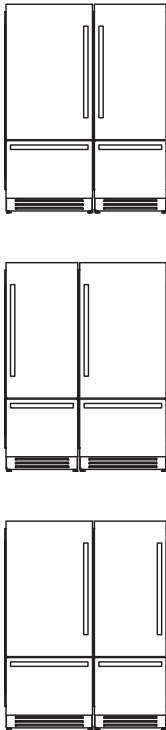

### TOP VIEW <sup>b</sup>



### FRONT VIEW

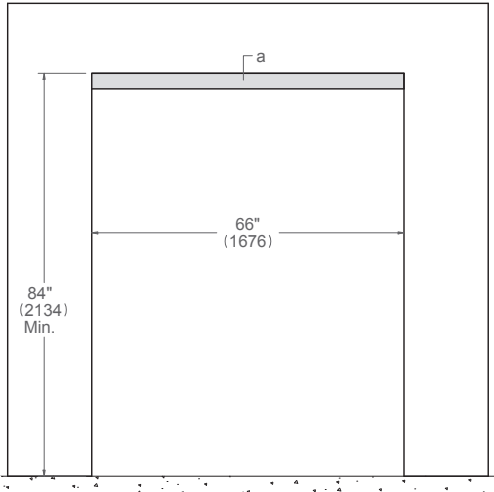

a Anti-tipping brackets included with appliance – 66"x3/16"  
b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.




# 72" Bottom Mount Double Configurations

## Flush installation



### POSSIBLE COMBINATIONS


REF36BMBZPNV  
REF36BMBZPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

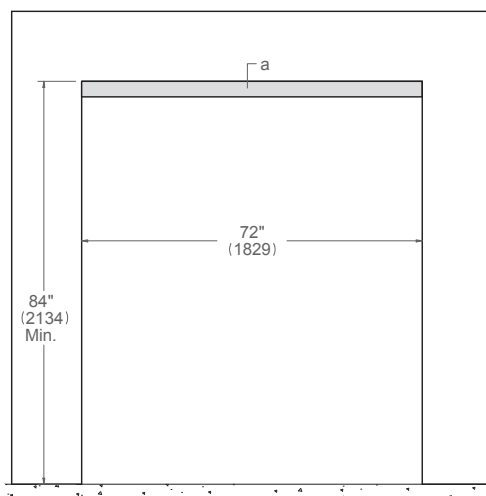

a Anti-tipping brackets included with appliance – 72"x3/16"

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.




# 48" Double Configurations\*

## Flush installation




### POSSIBLE COMBINATIONS °

REF30BMBZPNV  
REF18WCBPLV




REF30BMBZPNV  
REF18WCBPRV



### TOP VIEW °



### FRONT VIEW

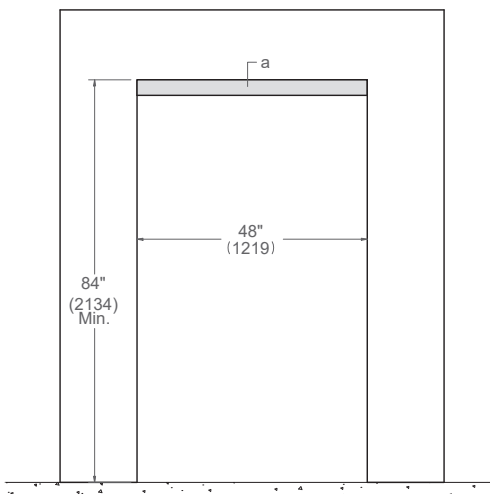

a: Area to be left clear for the anti-tipping brackets – 48"x 3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.



# 54" Double Configurations\*

## Flush installation





### POSSIBLE COMBINATIONS

REF30BMBZPNV  
REF24WCBPNV





REF36BMBZPNV  
REF18WCBPLV

REF36BMBZPNV  
REF18WCBPRV



REF36FDBZPNV/24  
REF18WCBPLV


REF36FDBZPNV/24  
REF18WCBPRV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

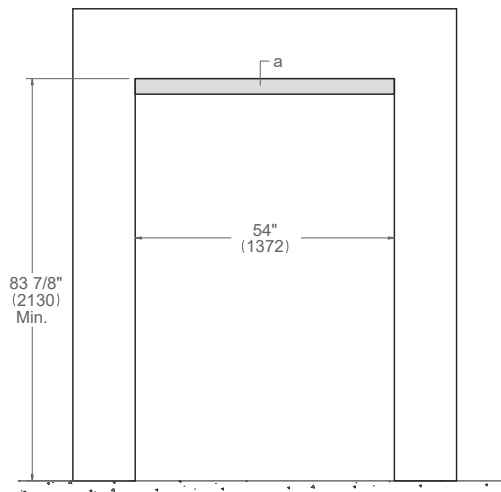

a Area to be left clear for the anti-tipping brackets – 54"x 3/16"

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.



# 60" Double Configurations\*

## Flush installation





### POSSIBLE COMBINATIONS

REF36BMBZPNV  
REF24WCBPNV




REF36FDBZPNV/24  
REF24WCBPNV



### TOP VIEW <sup>b</sup>



### FRONT VIEW

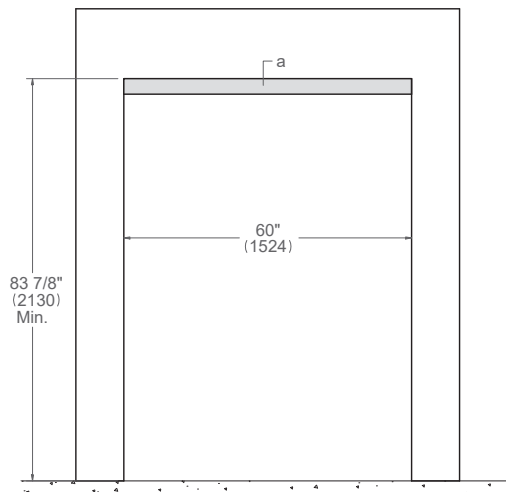

a: Area to be left clear for the anti-tipping brackets – 60"x 3/16"

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.

\* The combination of bottom mount and wine column is only available for panel ready models.


All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations. No additional accessories are needed.

# French Door Custom Door Panel




## REARPANELDRILLING

## CUSTOM HANDLES MOUNTING AREA

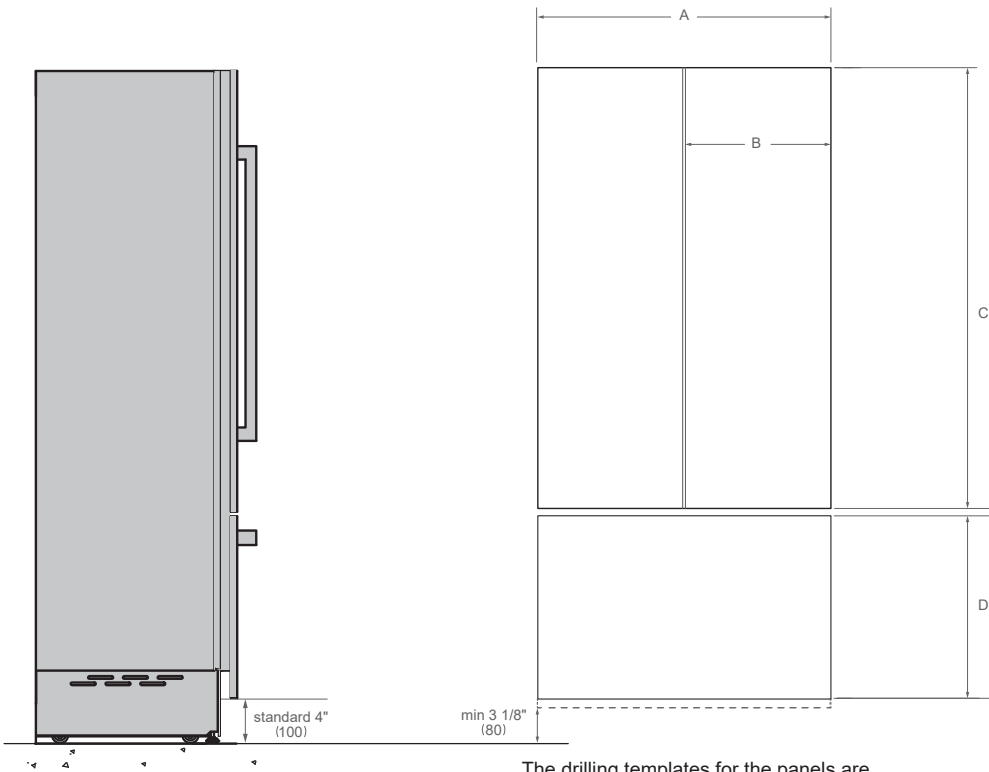

The drilling templates for the panels are included in the refrigerator packaging.

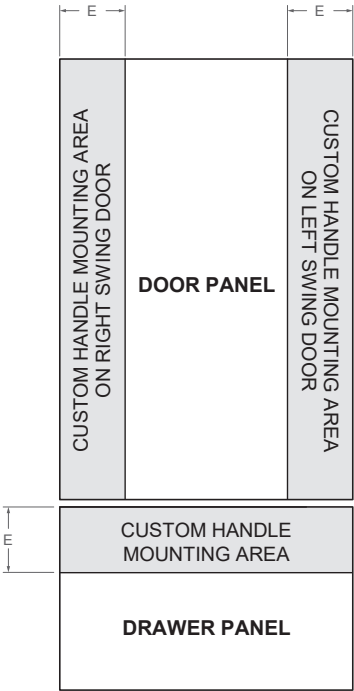

	36"
A	35 11/16" (907)
B	17 3/4" (451)
C	51 1/16" (1297)
D	28 11/16" (729)
E	7 1/8" (182)



Dimensions in parentheses are millimeters unless otherwise specified.  
Minimum gap between custom door panels and adjacent cabinetry is 1/8" (3.5).

# Bottom Mount Custom Door Panel



## 36" & 30" BOTTOM MOUNT REAR PANEL DRILLING

## CUSTOM HANDLES MOUNTING AREA

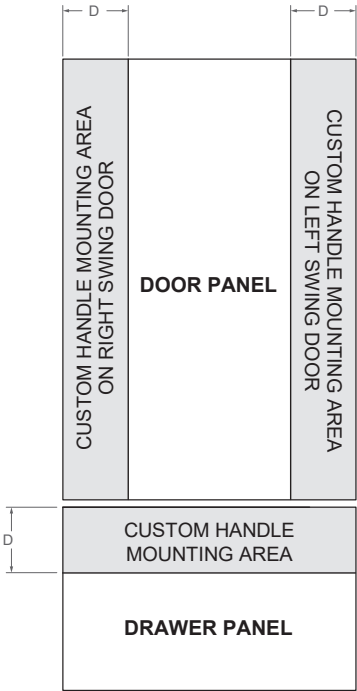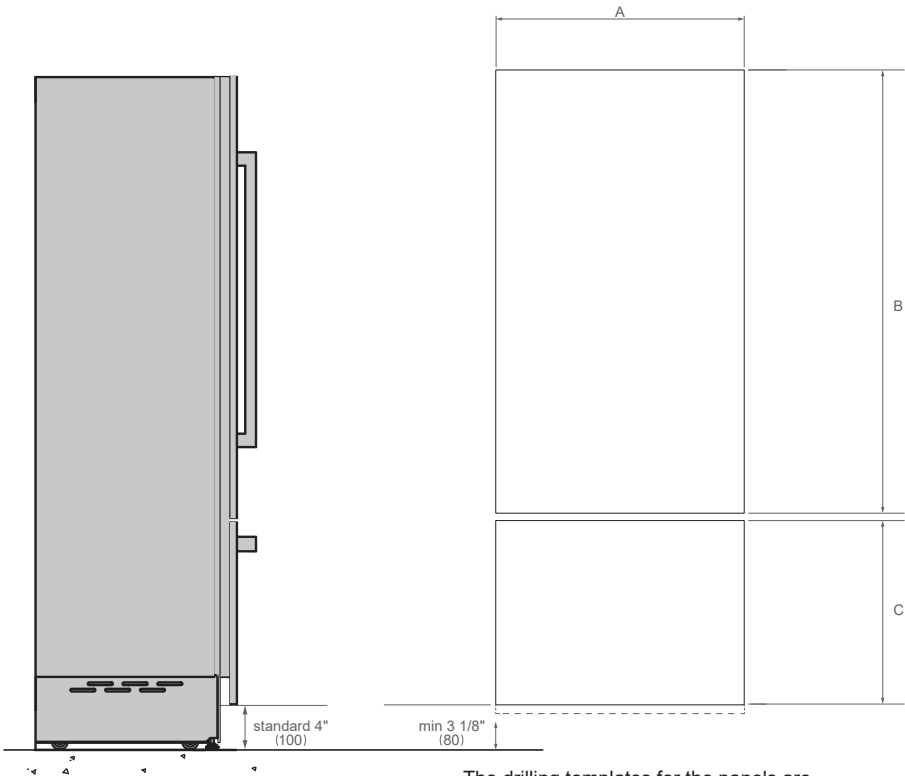

The drilling templates for the panels are included in the refrigerator packaging.


	36"	30"
A	35 3/4" (908)	29 3/4" (756)
B	51 1/16" (1297)	51 1/16" (1297)
C	28 11/16" (729)	28 11/16" (729)
D	7 1/8" (182)	6" (152)

Dimensions in parentheses are millimeters unless otherwise specified.  
Minimum gap between custom door panels and adjacent cabinetry is 1/8" (3).


# French Door Refrigeration Handles




**PROFESSIONAL SERIES**  
**HK36PROFDBXV**

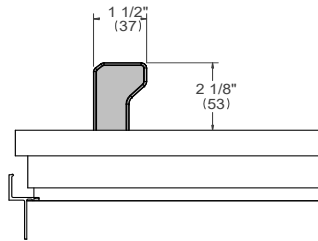


**MASTER SERIES**  
**HK36MASFDBXV**




**HERITAGE SERIES**  
**HK36HERFDBXV**

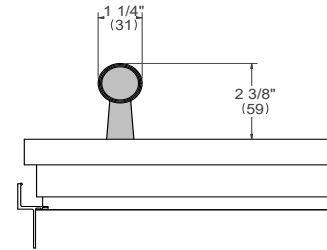

**BERTAZZONI HANDLES**  
**DRILLING ON LEFT SWING**  
**REFRIGERATOR DOOR**

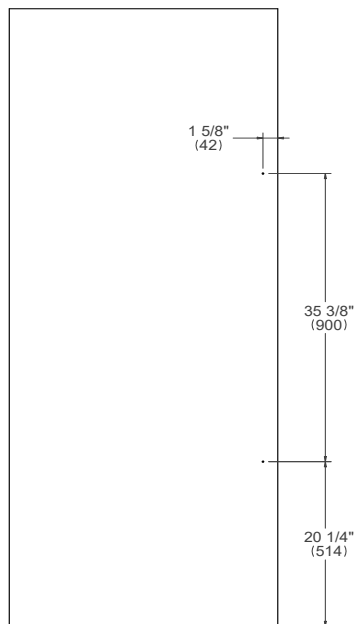

**BERTAZZONI HANDLES**  
**DRILLING ON RIGHT SWING**  
**REFRIGERATOR DOOR**

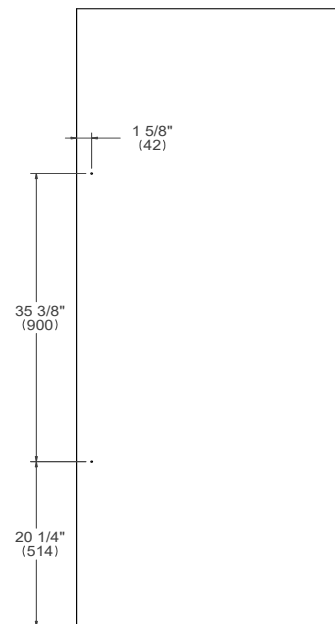

## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.


Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


# French Door Refrigeration Handles




**PROFESSIONAL SERIES**  
**HK36PROFDBXV**




**MASTER SERIES**  
**HK36MASFDBXV**



**HERITAGE SERIES**  
**HK36HERFDBXV**



**BERTAZZONI HANDLES**  
**36" (90CM) FREEZER DRAWER**

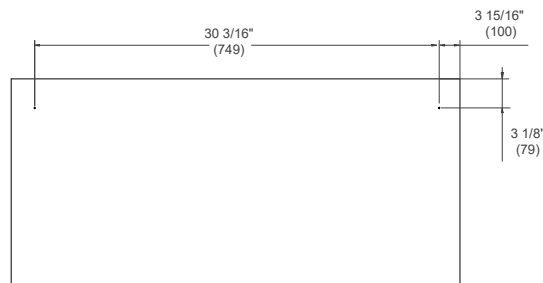

## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.


Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


# Bottom Mount Refrigeration Handles




## PROFESSIONAL SERIES PROHK36PI PROHK30PI




### BERTAZZONI HANDLES DRILLING ON RIGHT SWING REFRIGERATOR DOOR

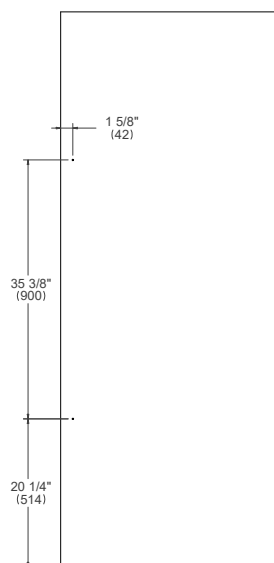


## MASTER SERIES MASHK36PI MASHK30PI



### BERTAZZONI HANDLES DRILLING ON LEFT SWING REFRIGERATOR DOOR

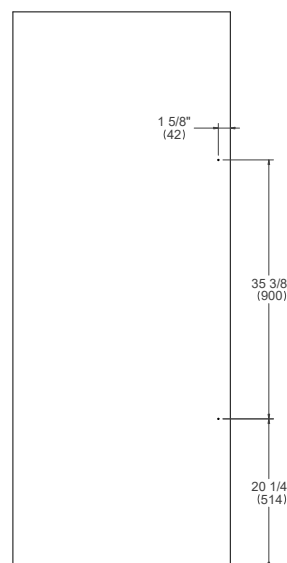

## HERITAGE SERIES HERHK36PI HERHK30PI



## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit. Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.


Dimensions in parentheses are millimeters unless otherwise specified.




# Bottom Mount Refrigeration Handles




## PROFESSIONAL SERIES PROHK36PI PROHK30PI




## MASTER SERIES MASHK36PI MASHK30PI




## HERITAGE SERIES HERHK36PI HERHK30PI



## BERTAZZONI HANDLES DRILLING ON 30" (75CM) FREEZER DRAWER

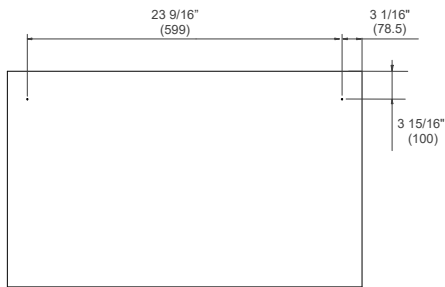

## BERTAZZONI HANDLES DRILLING ON 36" (90CM) FREEZER DRAWER

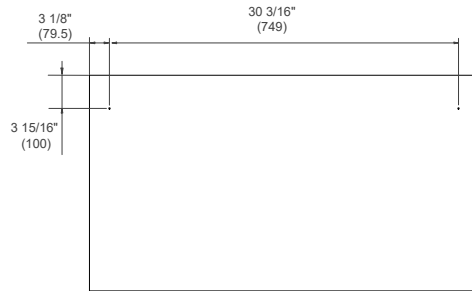

## HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 3/8". Suitable inserts can be ordered at [www.encompass.com](http://www.encompass.com)

Part Number: 95631A100, contains n°4 M5 brass hardwood inserts and 1 M5 installation bit.

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.



TO COOK BEAUTIFULLY